

VX SCREEN

+30 años siendo testigos de los mejores momentos de tu vida

VX SCREEN



Vertilux México

Copyright © 2022. Todos los derechos reservados.

VX SCREEN

4 NATURE 3%

8 NATURE 5%

12 BARU-10%

18 BRYSON-11%

22 2900-5%

30 CREEPER-11%

34 STUCCO-8%

40 3000 BLACKOUT

44 3000-1%

50 3000-3%

56 3000-10%

62 3000-5%

68 4000-5%

74 8200-3%

78 320-20%

15
MODELOS

93
COLORES

Todos nuestros distribuidores trabajan con tejidos, componentes y motores VERTILUX si alguien te ofrece un producto diferente al que deseas o un producto que no es VERTILUX repórtalo, la satisfacción de nuestros clientes es primero.

Copyright © 2022. Todos los derechos reservados.

The healthy choice



NATURE 3%


VX SCREEN

NATURE 3%



LINEN 0-004-53-00398

NATURE 3%

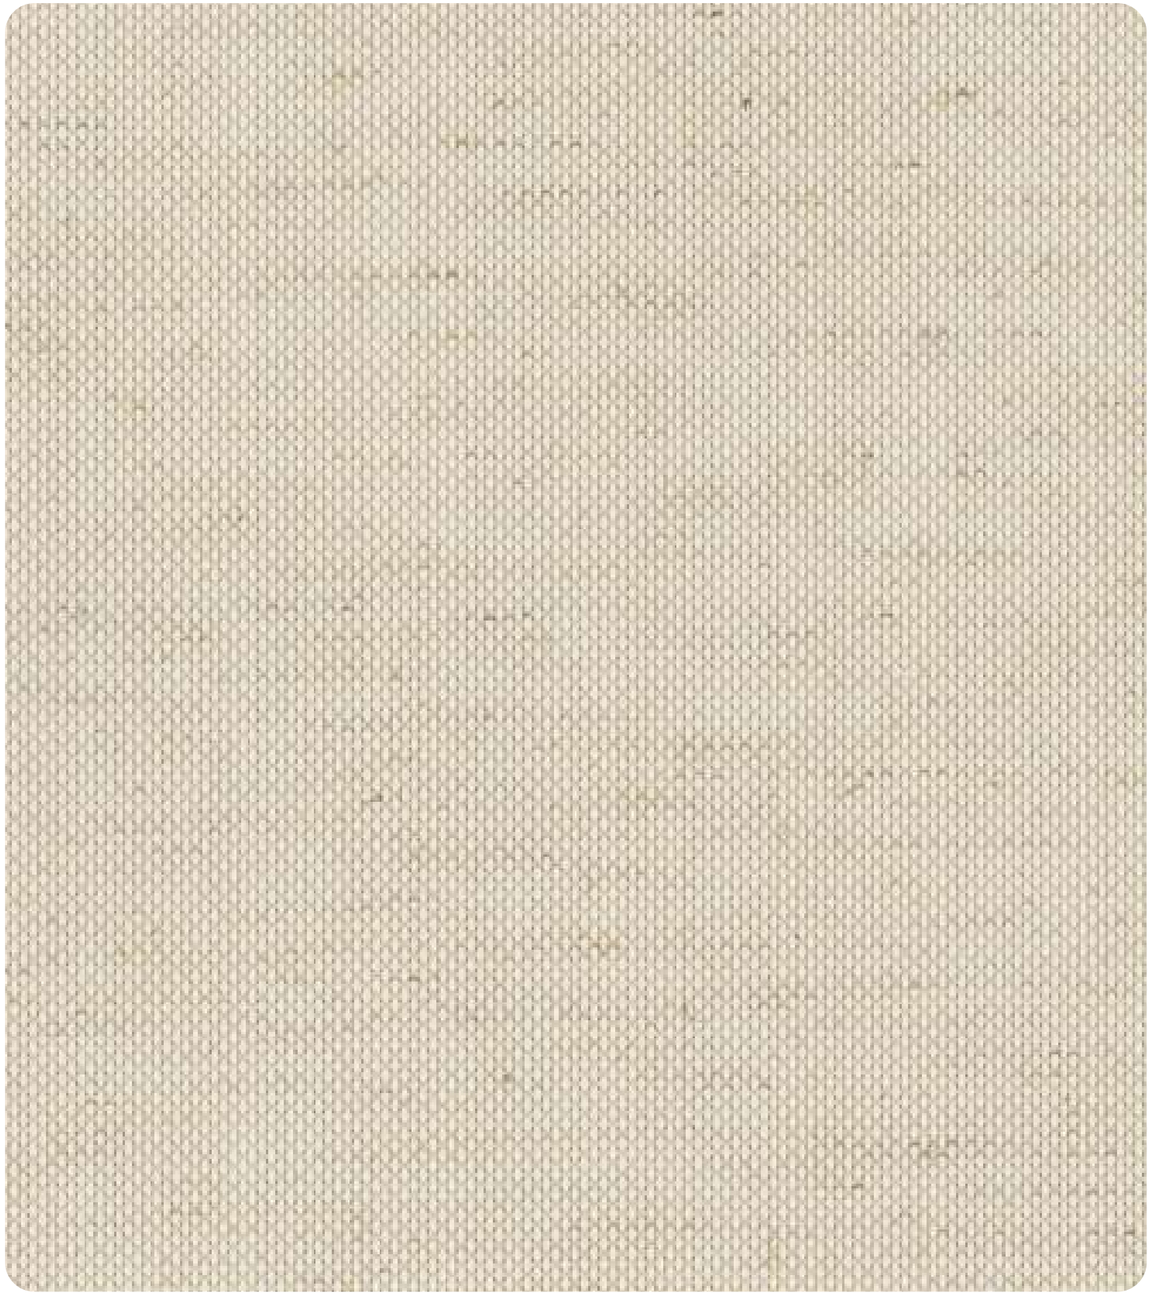

IVORY LINEN 0-004-53-00498

vertilux.mx

VX SCREEN
NATURE-3%

VERTILUX
IDEAS FOR YOUR SPACE

TECHNICAL PROPERTIES

Composition	35.5% PES + 64.5% PVC
Weight	416 g/m² (± 5%) | 12.27 oz/yd² (± 5%)
Thickness	0.58 mm (± 5%) | 0.023 in (± 5%)
Yarn Diameter	0.34 mm
Roll Width	2.5 m | 98 in
Roll Length	25 m | 27 yd
Openness Factor	~ 3%
UV Blockage	~ 97%
Mesh/in	Warp: 54 | Fill: 46
Light Fastness	Class 5
Tensile Strength	Warp: 380 lb | Weft: 380 lb
Tearing Strength	40 daN
Flame Retardant	NFPA 701

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE

1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Hand wash with lukewarm water and a mild detergent solution.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING

Can be Railroaded

COLD

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS

The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS

Roller Shades

Sliding Panels

Indoor Use Only

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.



The healthy choice



NATURE 5%

VX SCREEN

NATURE 5%



LINEN 0-004-55-00398

NATURE 5%



IVORY LINEN 0-004-55-00498

vertilux.mx

VX SCREEN
NATURE-5%

VERTILUX
IDEAS FOR YOUR SPACE

TECHNICAL PROPERTIES

Composition	35.5% PES + 64.5% PVC
Weight	385 g/m² (± 5%) | 11.35 oz/yd² (± 5%)
Thickness	0.58 mm (± 5%) | 0.023 in (± 5%)
Yarn Diameter	0.34 mm
Roll Width	2.5 m | 98 in
Roll Length	25 m | 27 yd
Openness Factor	~ 5%
UV Blockage	~ 95%
Mesh/in	Warp: 48 | Fill: 48
Light Fastness	Class 5
Tensile Strength	Warp: 380 lb | Fill: 380 lb
Tearing Strength	40 daN
Flame Retardant	NFPA 701

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE

1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Hand wash with lukewarm water and a mild detergent solution.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING

Can be Railroaded

COLD

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS

The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS

Roller Shades

Sliding Panels

Indoor Use Only

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.





BARU-10%


VX SCREEN

BARU-10%




DOVE 0-004-74-00198


BARU-10%

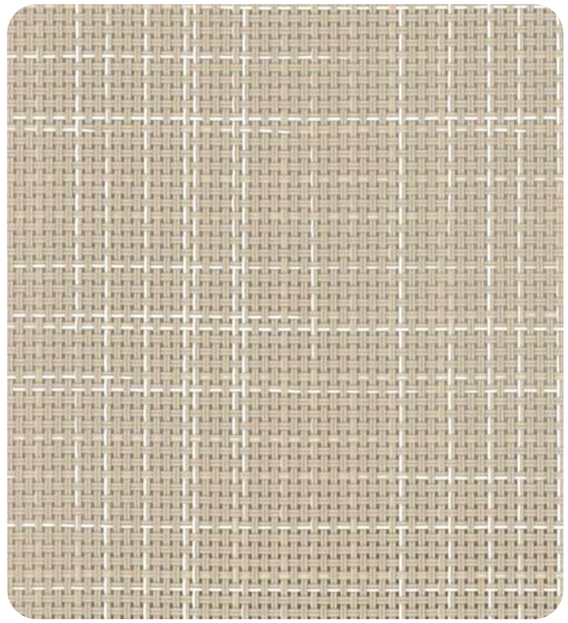


BAMBI 0-004-74-00598

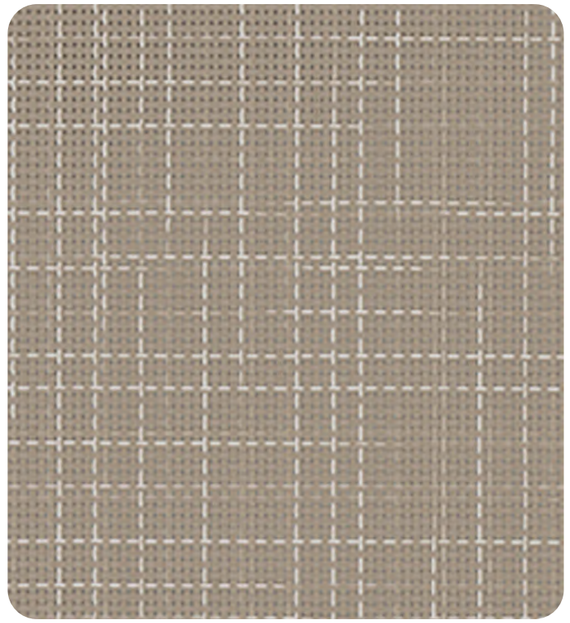

CAMEL 0-004-74-00398

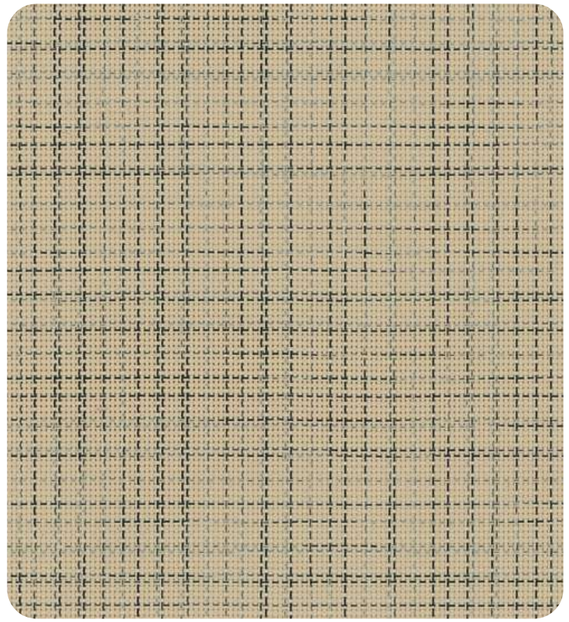


LEOPARD 0-004-74-00698

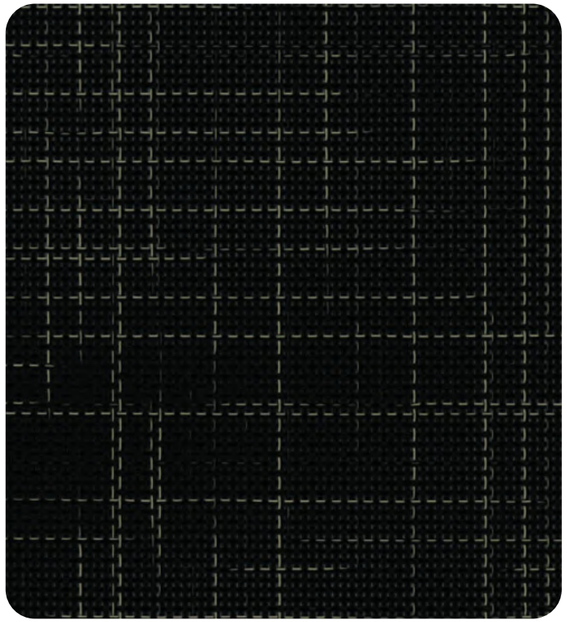

PANTHER 0-004-74-00498

INICIO

BARU-10%

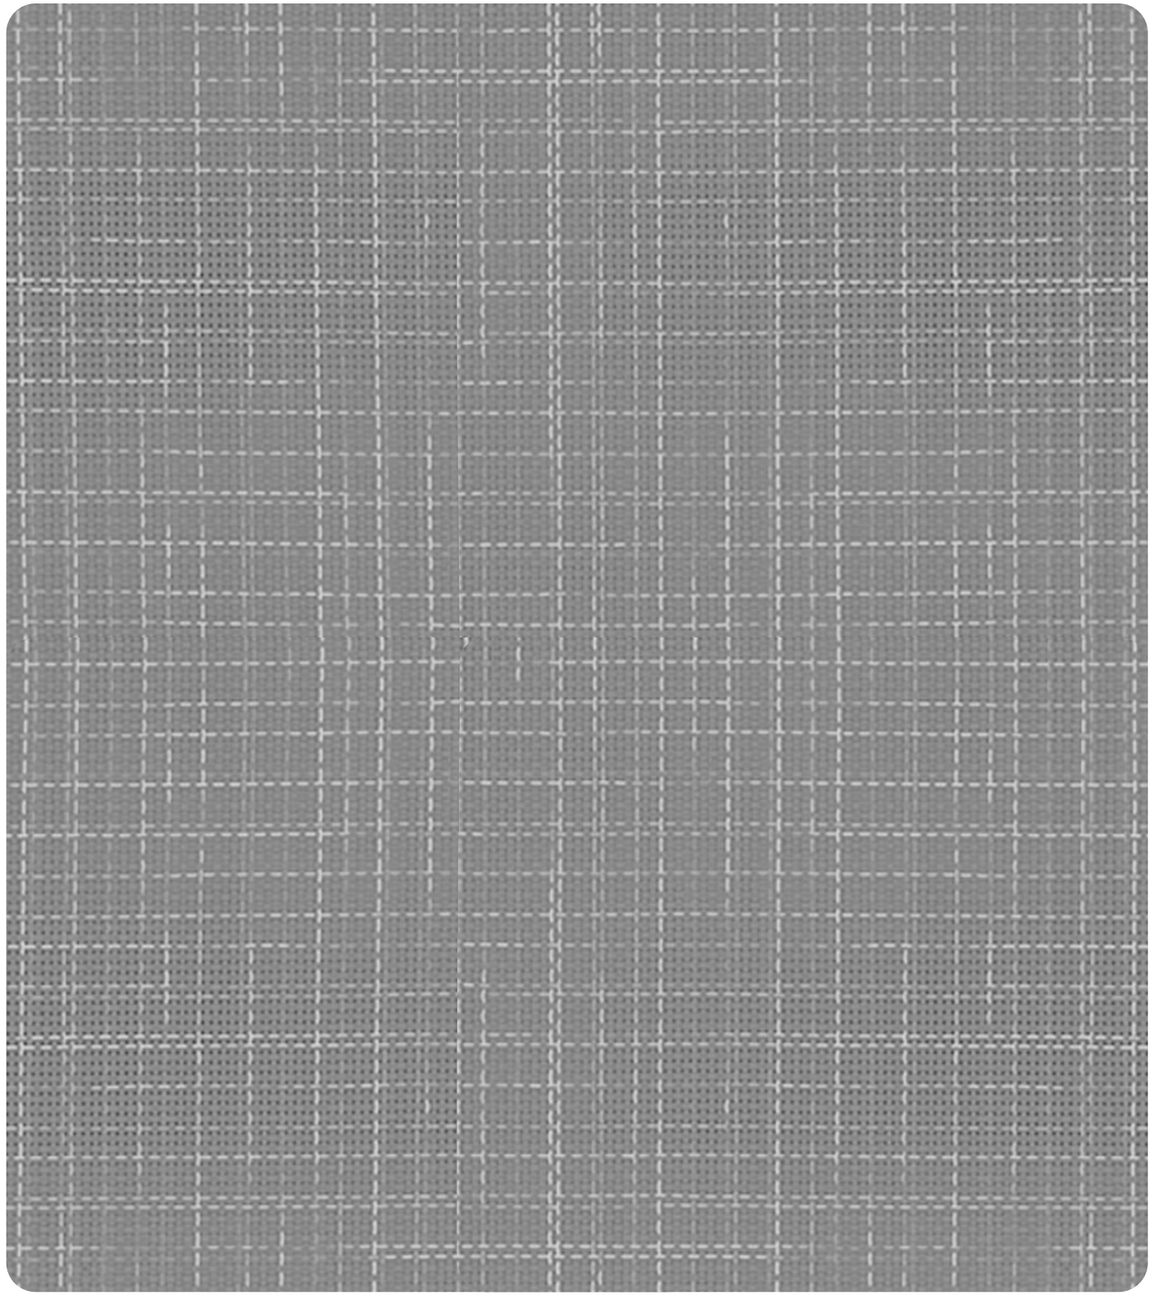

WOLF 0-004-74-00298

VX SCREEN
BARU-10%

VERTILUX
IDEAS PARA TU ESPACIO

TECHNICAL PROPERTIES

Composition	25% PES + 75% PVC
Weight	486 g/m² (± 5%) | 14.33 oz/yd² (± 5%)
Thickness	0.72 mm (± 5%) | 0.028 in (± 5%)
Yarn Diameter	Warp: 0.42 mm | Fill: 0.42 mm
Roll Width	2.5 m | 98 in
Roll Length	27.43 m | 30 yd
Openness Factor	~ 10%
UV Blockage	~ 90%
Mesh/in	Warp: 36 | Fill: 32
Light Fastness	7 - 8 Xenotest Grade
Tensile Strength	Warp: 342.5 lb | Weft: 268.5 lb
Tearing Strength	Warp: 26.1 lbf | Weft: 35.6 lbf
Flame Retardant	NFPA 701

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)	Tv(%)
Bambi	24	41	35	19
Camel	18	29	54	14
Dove	23	61	16	20
Leopard	22	36	42	18
Panther	14	04	82	14
Wolf	19	26	55	16

CARE & MAINTENANCE

1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Hand wash with lukewarm water and a mild detergent solution.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING

Use Only on Roll Direction

COLD

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS

The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS

Roller Shades

Sliding Panels

Indoor Use Only

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.



VERTILUX
IDEAS PARA TU ESPACIO

VX SCREEN

Vertilux México

Copyright © 2022. Todos los derechos reservados.



BRYSON-11%


VX SCREEN

BRYSON-11%




LIGHT GREY 0-004-72-00198

BRYSON-11%

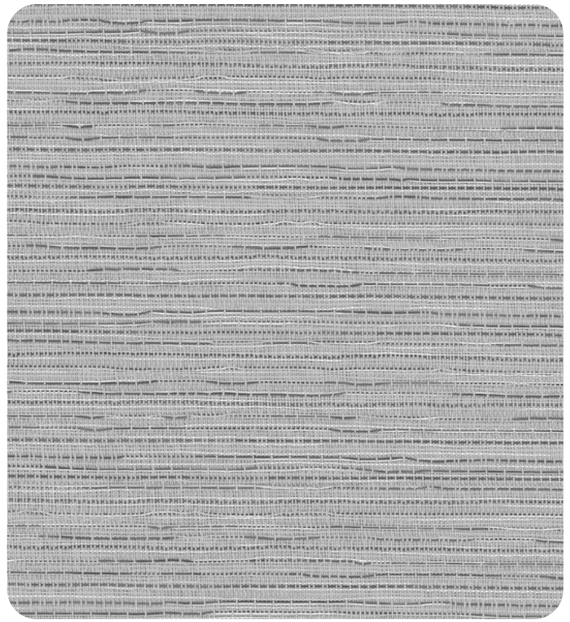


SILVER 0-004-72-00298

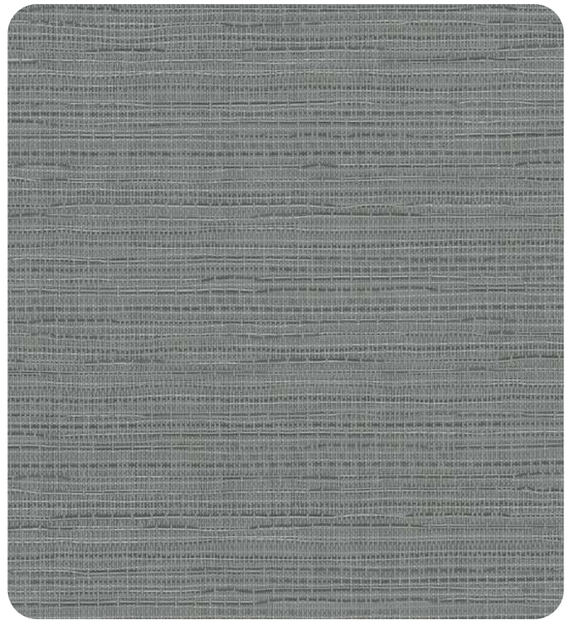

ASH 0-004-72-00398



STONE 0-004-72-00498

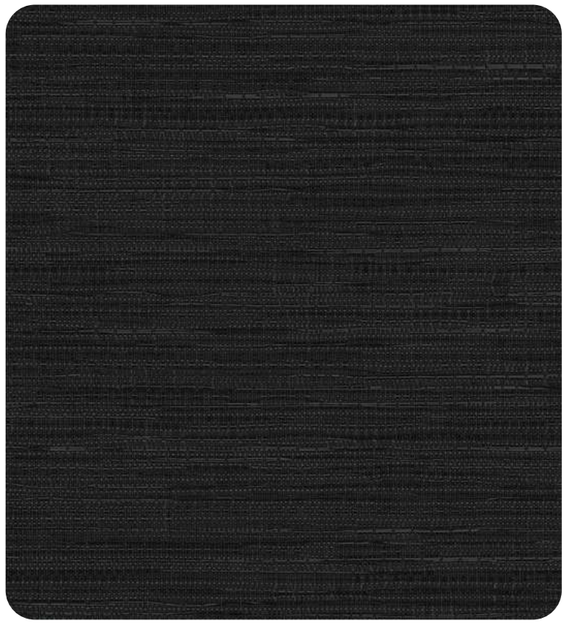

GRAPHITE 0-004-72-00598

VX SCREEN

BRYSON-11%

VERTILUX
IDEAS PARA TU ESPACIO

TECHNICAL PROPERTIES

Composition	16% PES + 84% PVC
Weight	426 g/m² ± 5% | 12.56 oz/yd² ± 5%
Thickness	0.65 mm ± 5% | 0.025 in ± 5%
Yarn Diameter	Warp: 0.42 mm | Fill: 0.32 mm
Roll Width	2.5 m | 98 in
Roll Length	27.43 m | 30 yd
Openness Factor	~ 11%
UV Blockage	~ 89%
Mesh/in	Warp: 40 | Fill: 32
Light Fastness	7 - 8 Xenotest Grade
Tensile Strength	Warp: 208.2 lb | Weft: 89.7 lb
Tearing Strength	Warp: 28.3 lbf | Weft: 31.8 lbf
Flame Retardant	NFPA 701

*Performance evaluations conducted by independent laboratories.

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)	Tv(%)
Ash	17	24	59	13
Graphite	13	09	78	12
Light Grey	24	48	28	21
Silver	20	33	47	16
Stone	16	20	64	13

CARE & MAINTENANCE

1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING

Use Only on Roll Direction

COLD

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS

The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS

Roller Shades

Sliding Panels

Indoor Use Only

Visita nuestro blog
Ideas para tu espacio
Ir ahora ►


IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.



2900-5%


VX SCREEN

2900-5%

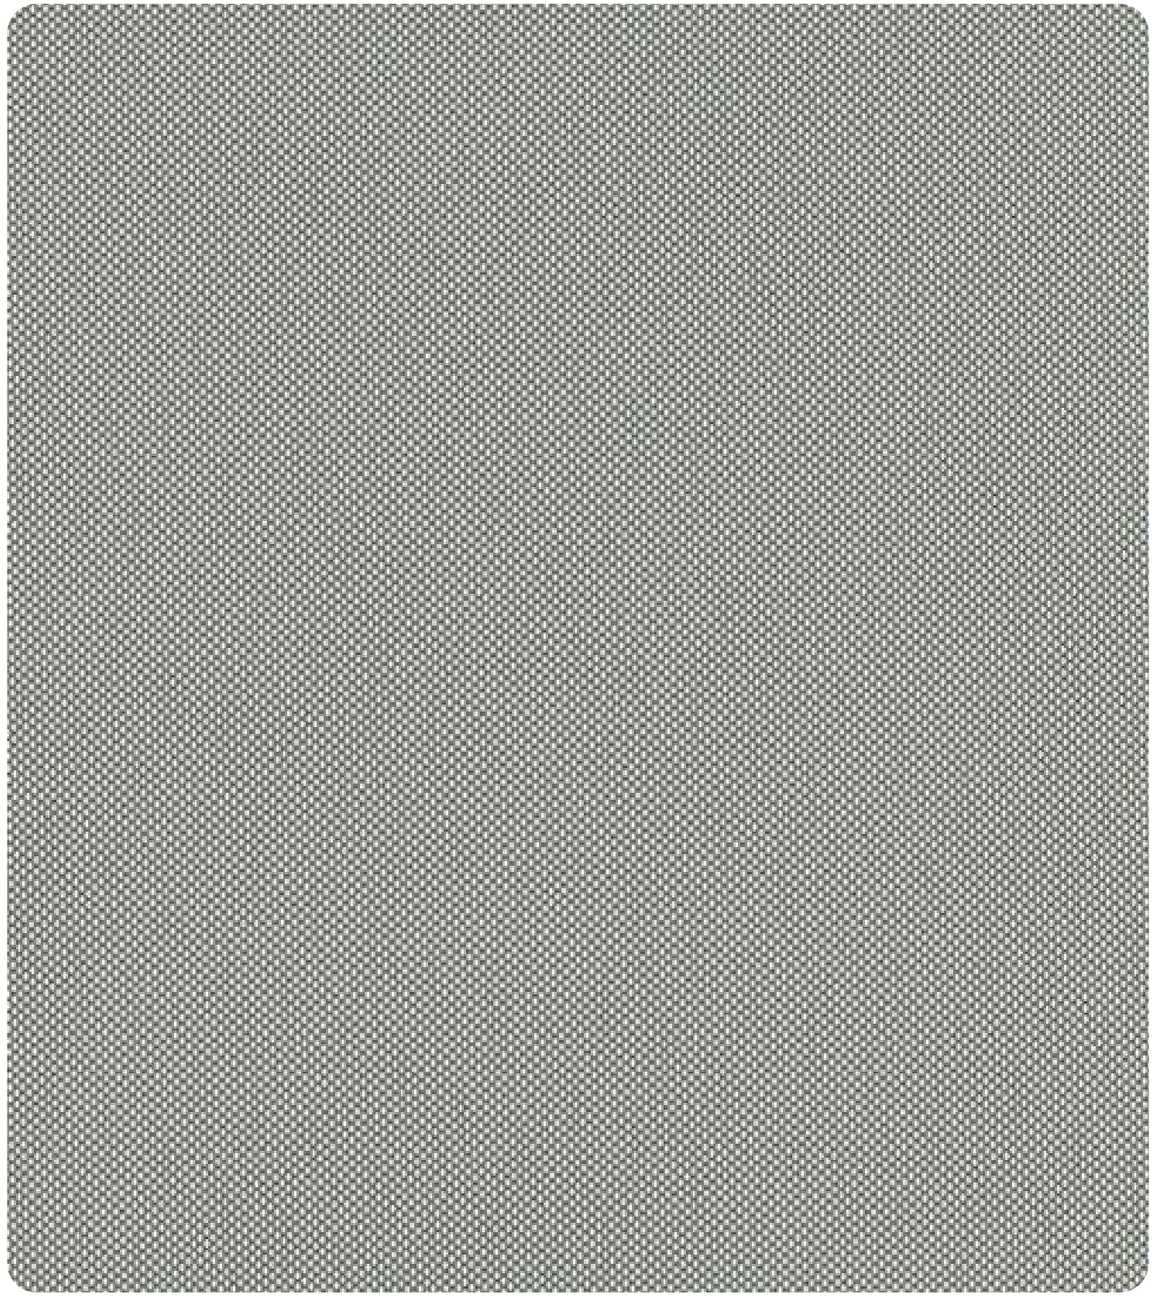


PEARL GREY 0-004-52-07198


2900-5%

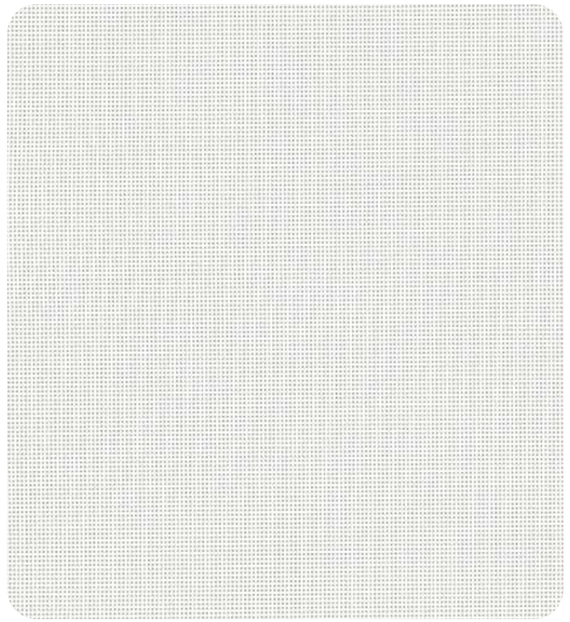

WHITE 0-004-52-00263 | 00278 | 00298 | 00218

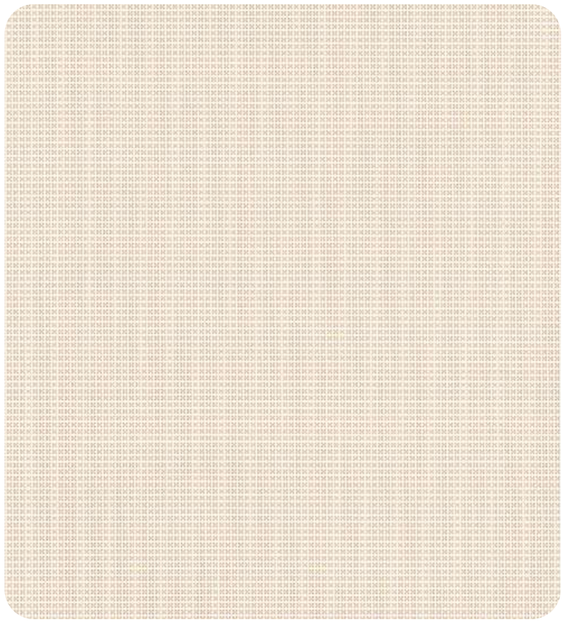

LIMESTONE 0-004-52-24098

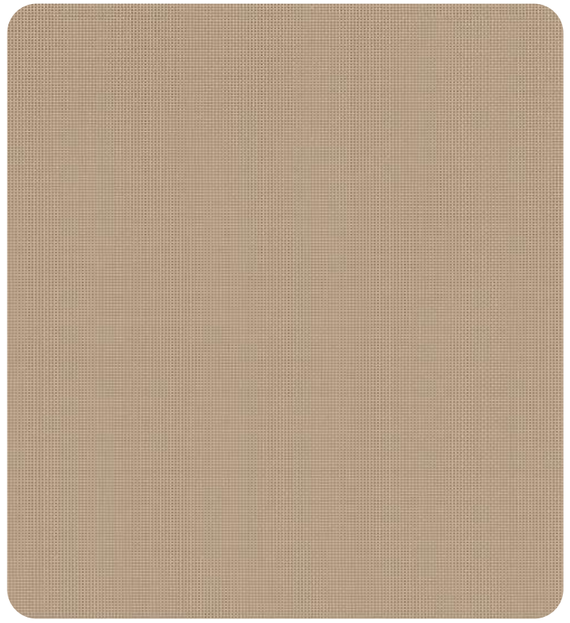


TAUPE SAND 0-004-52-21098




WHITE LINEN 0-004-52-22063 | 22078 | 22098 | 22018


2900-5%

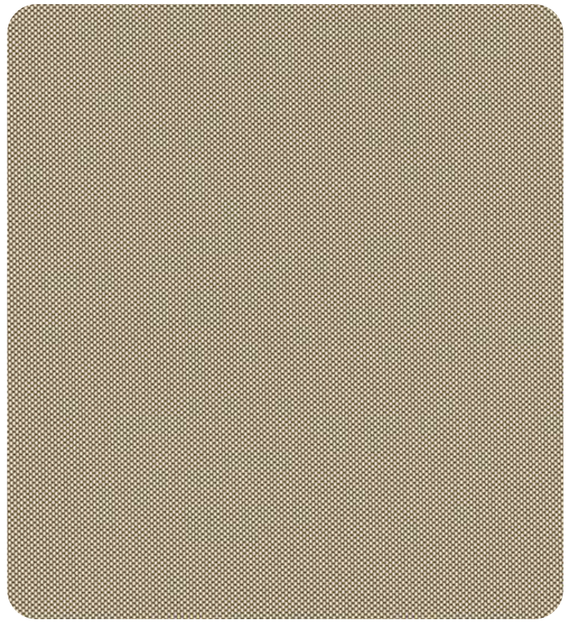


LINEN MOCHA 0-004-52-31598

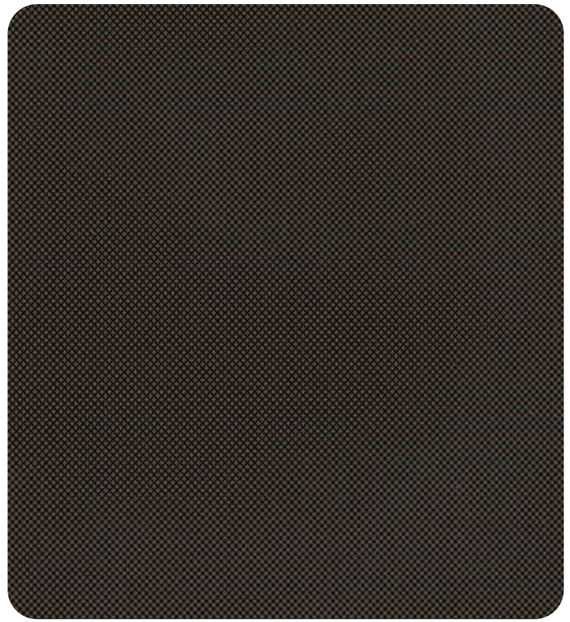

CHESTNUT 0-004-52-18363 | 18378 | 18398 | 18318

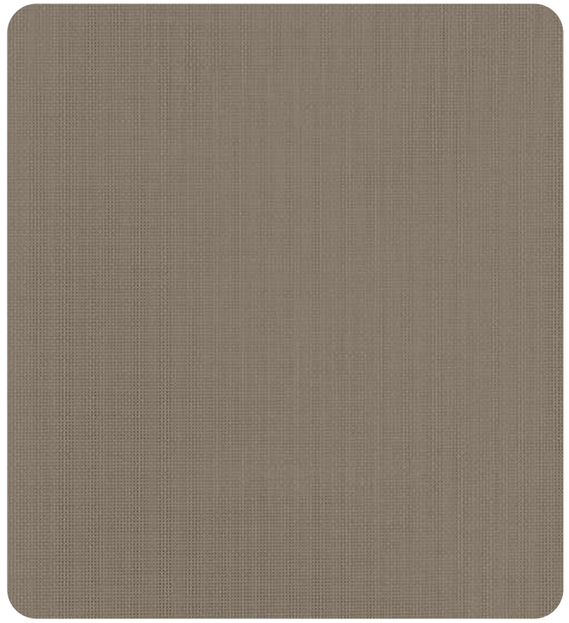


PEWTER 0-004-52-23098

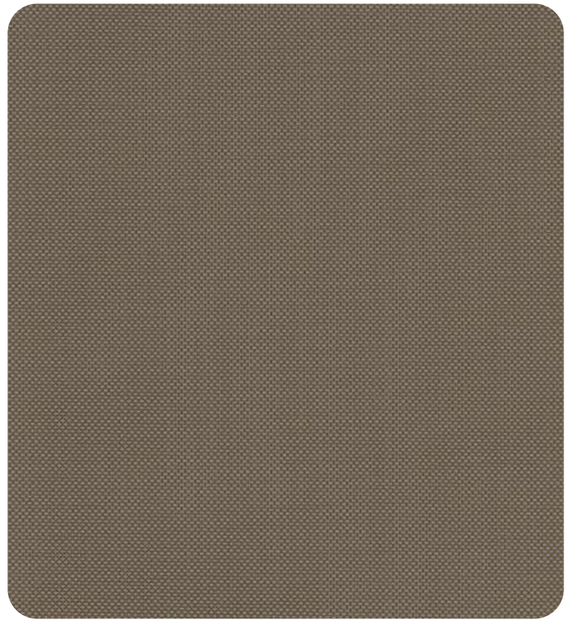


SLATE 0-004-52-27098


2900-5%

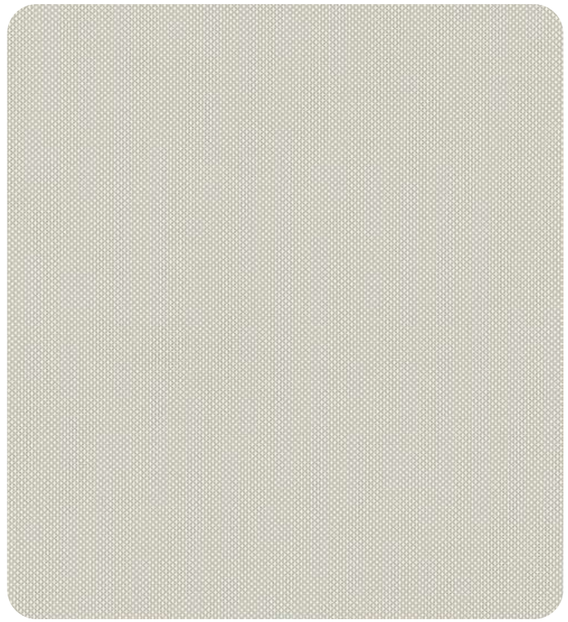


LIGHT GREY 0-004-52-00798

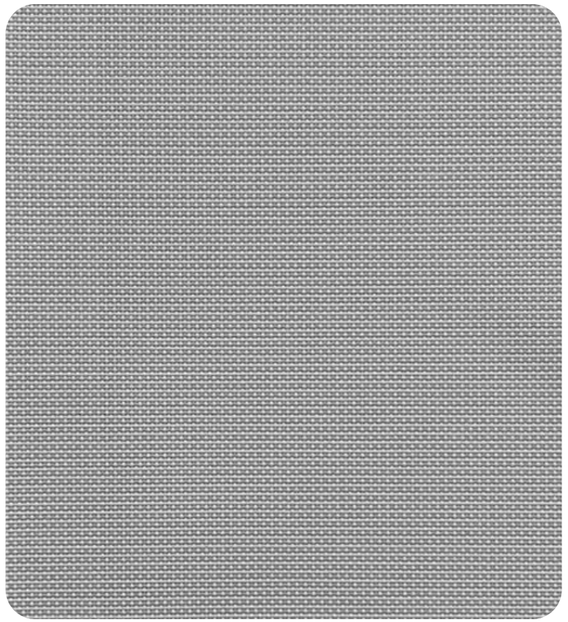

GREY JASPER 0-004-52-25098

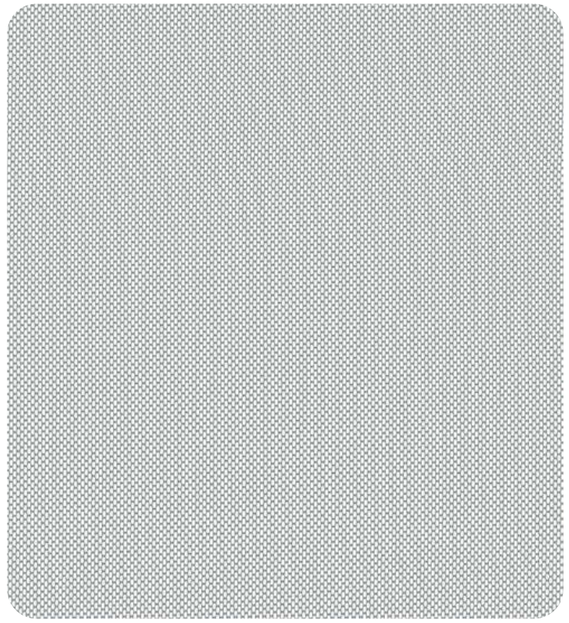


WHITE PEARL 0-004-52-02763 | 02778 | 02798 | 02718

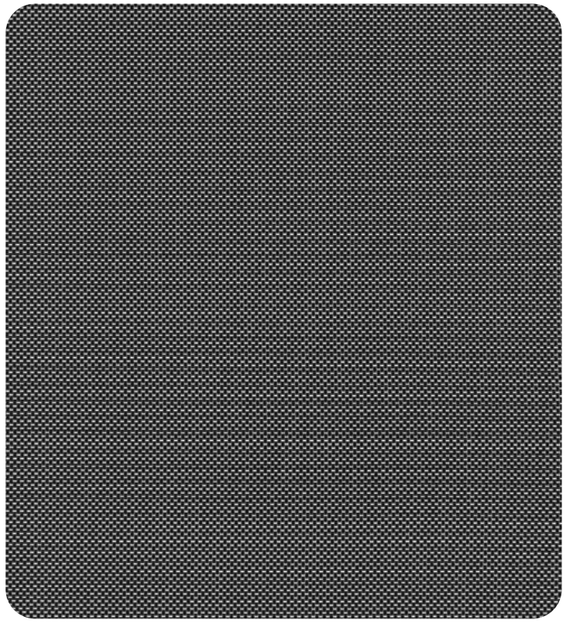


EBONY PEARL 0-004-52-20063 | 20078 | 20098 | 20018

INICIO

2900-5%

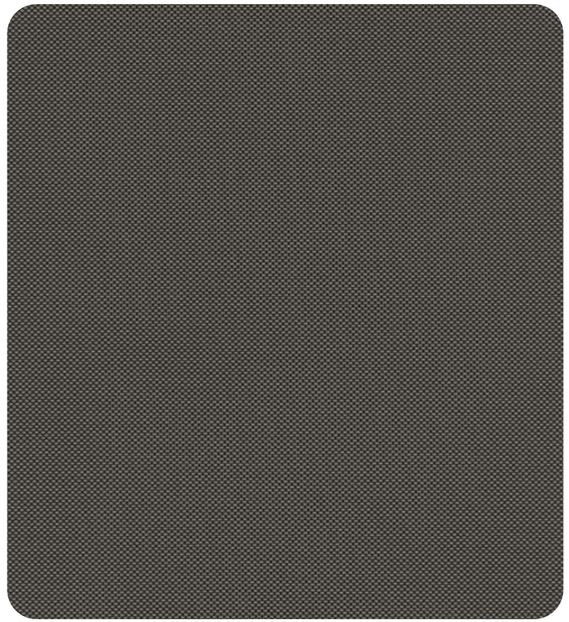

EBONY GREY 0-004-52-11098

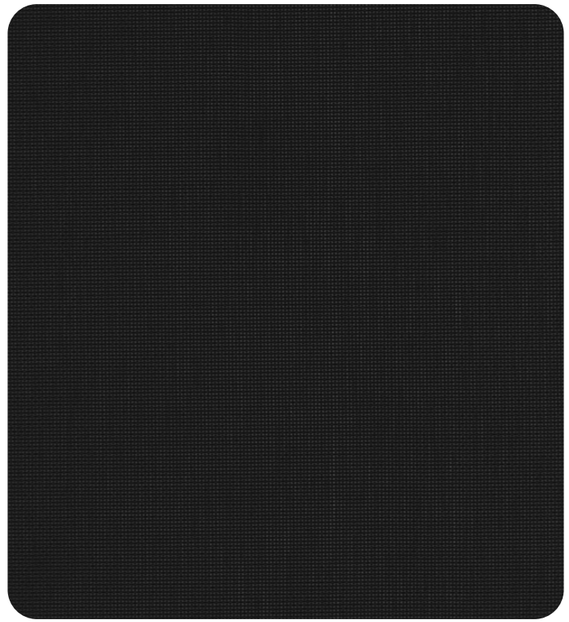

EBONY 0-004-52-01963 | 01978 | 01998 | 01918

vertilux.mx

VX SCREEN
2900-5%

VERTILUX
IDEAS PARA TU ESPACIO

TECHNICAL PROPERTIES

Composition	30% PES + 70% PVC
Weight	395 g/m² (± 5%) | 11.65 oz/yd² (± 5%)
Thickness	0.57 mm (± 5%) | 0.022 in (± 5%)
Yarn Diameter	Warp: 0.32 mm | Fill: 0.42 mm
Roll Width	All colors: 2.5 m & 3.0 m | 98 in & 118 in White, White Linen, White Pearl: also available in 1.6 m & 2.0 m | 63 in & 78 in
Roll Length	30 m | 32.81 yd
Openness Factor	~ 5%
UV Blockage	~ 95%
Mesh/in	Warp: 50 | Fill: 25
Light Fastness	Class 5
Tensile Strength	Warp: 136 daN/5cm | Weft: 154 daN/5cm
Tearing Strength	Warp: 18 daN | Weft: 21.5 daN
Flame Retardant	NFPA 701

*Performance evaluations conducted by independent laboratories.

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)	Tv(%)
Brown Chololate	14	13	73	13
Ebony	10	05	85	12
Ebony Pearl	11	07	82	15
Linen	29	43	28	27
Taupe	22	41	37	20
White	38	36	26	24
White Linen	34	16	50	18
White Pearl	32	06	62	17

CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING



Use Only on Roll Direction

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS



Roller Shades

Sliding Panels

Indoor Use Only



IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

VERTILUX
IDEAS PARA TU ESPACIO

VX SCREEN

Vertilux México

Copyright © 2022. Todos los derechos reservados.


The healthy choice



CREEPER-11%


VX SCREEN

CREEPER-11%

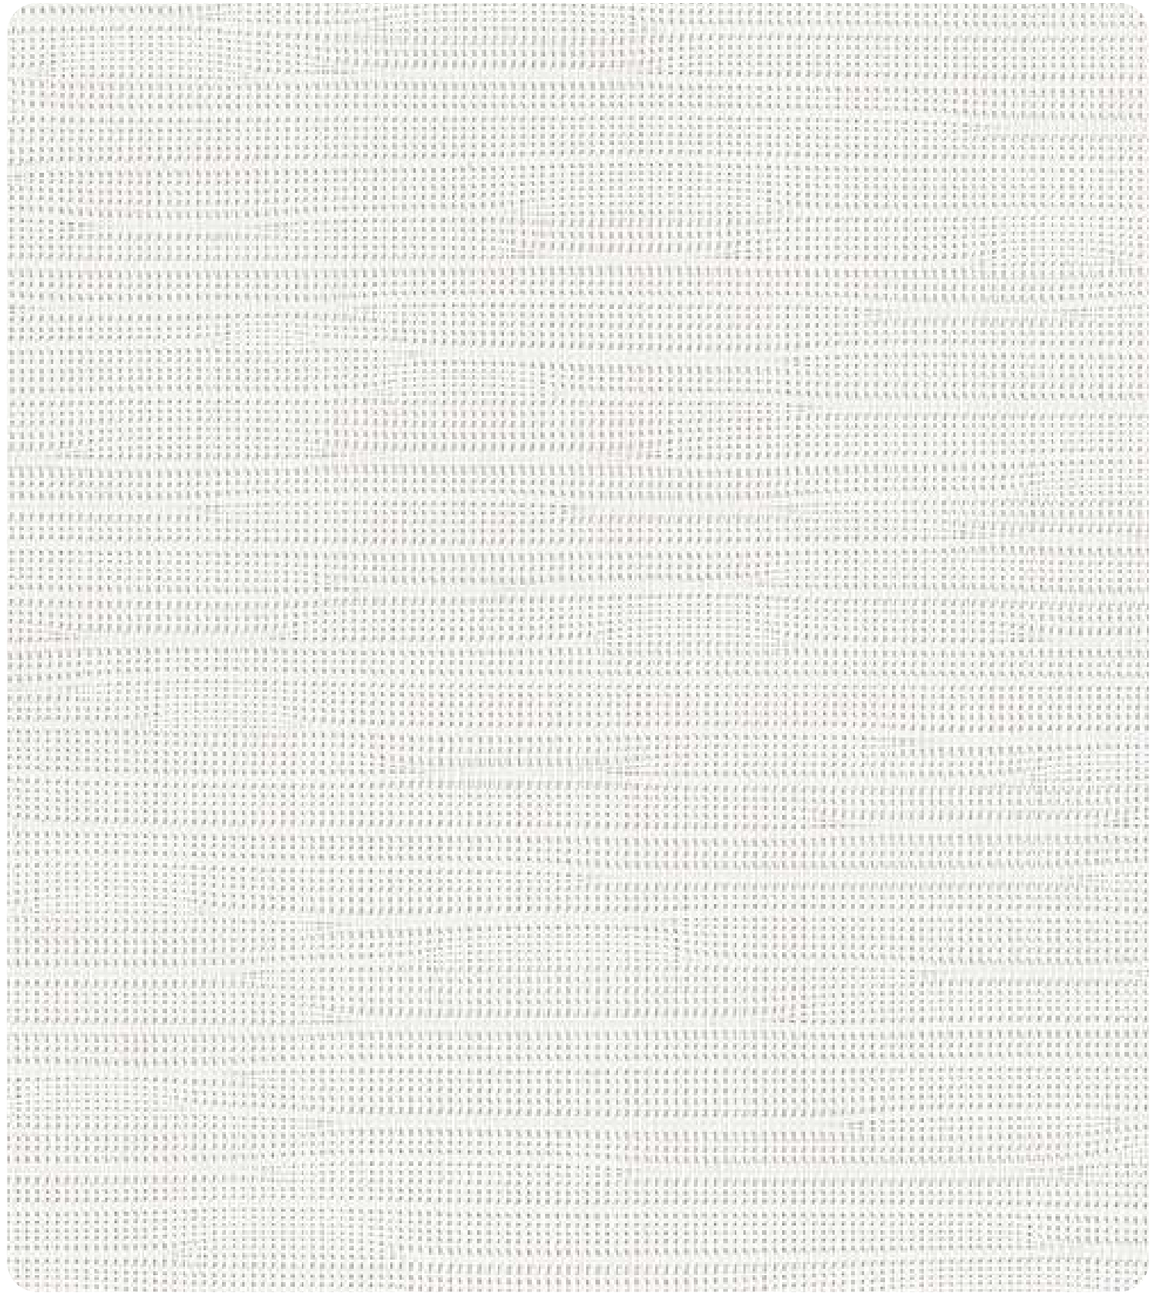

WHITE 0-004-71-00298

CREEPER-11%

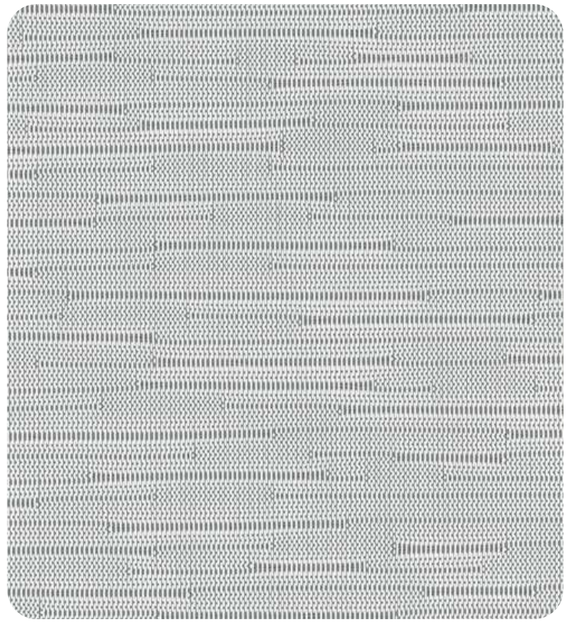

WHITE GRAY 0-004-71-23098



GOLD EBONY 0-004-71-39098

VX SCREEN

CREEPER-11%

VERTILUX
IDEAS PARA TU ESPACIO

PROPIEDADES TÉCNICAS

Composición	70% PVC + 30% PES
Peso	465 g/m² (± 5%) | 16.40 oz/yd² (± 5%)
Grosor	0.90 mm (± 5%) | 0.035 in (± 5%)
Diámetro de hilo	Urdimbre: 0.42 mm | Trama: 0.53 mm
Ancho de rollo	2.5 m | 98 in
Largo de rollo	27.43 m | 30 yd
Factor de apertura	11%
Bloqueo UV	89%
Resistencia a la tensión	Urd: 2118 (daN/5cm) | Trama: 1434(daN/5cm)
Resistencia al rasgado	Urd: 335 (daN) | Trama: 423 (daN)
Retardante al fuego	NFPA 701

PROPIEDADES DE CONTROL SOLAR

COLOR	Ts(%)	Rs(%)	As(%)	Tv(%)
White	-	-	-	-
White Grey	-	-	-	-
Gold Ebony	-	-	-	-

CUIDADO Y MANTENIMIENTO

1. Limpiar suavemente con esponja húmeda.
2. Aspirar para un mantenimiento regular.
3. No lavar.
4. No exprimir.
5. No usar cloro.
6. No usar secadora o sistemas de vapor.

MANUFACTURA

Usar únicamente en dirección del rollo

COLD

No requiere corte ultrasónico

CERTIFICACIONES INTERNACIONALES

The Vertilux Collection posee los más importantes certificados de la industria. Sin embargo, diferentes certificados aplican a diversos tejidos de nuestra colección. Para una mayor información sobre todos los certificados disponibles de los tejidos, por favor contacte a nuestro Departamente de Servicio a Cliente.

APLICACIONES

Enrollables

Panel Japonés

Uso interior

IMPORTANTE: Los valores y recomendaciones en esta ficha técnica no son contractuales y no pueden usarse para casos de reclamación o cancelación de pedidos. Los datos técnicos pueden variar sin previo aviso. Las muestras de color aquí presentadas pueden variar ligeramente con respecto al material de su pedido. Por lo tanto no se aceptarán devoluciones por variaciones mínimas de color o textura.


Visita nuestro blog
Ideas para tu espacio
Ir ahora ►



STUCCO-8%


VX SCREEN

STUCCO-8%

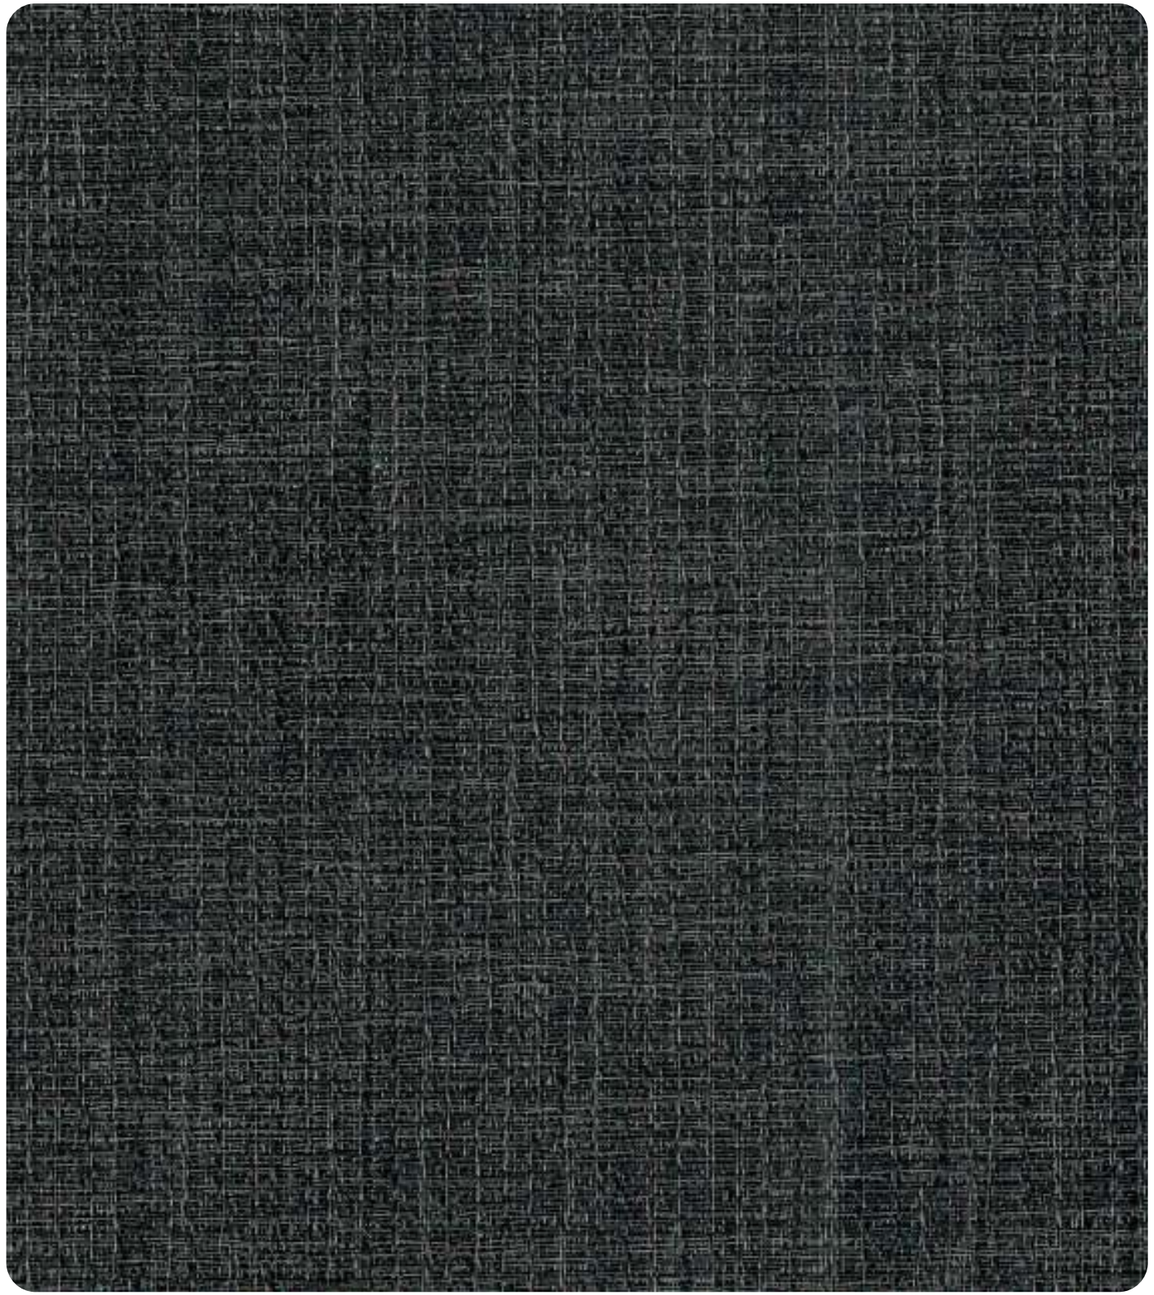

ASH 0-004-56-00598


STUCCO-8%

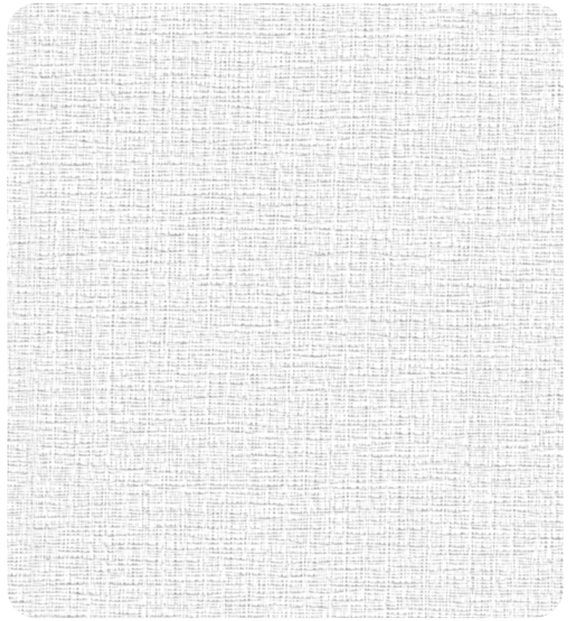

WHITE 0-004-56-00198



LINEN 0-004-56-00298

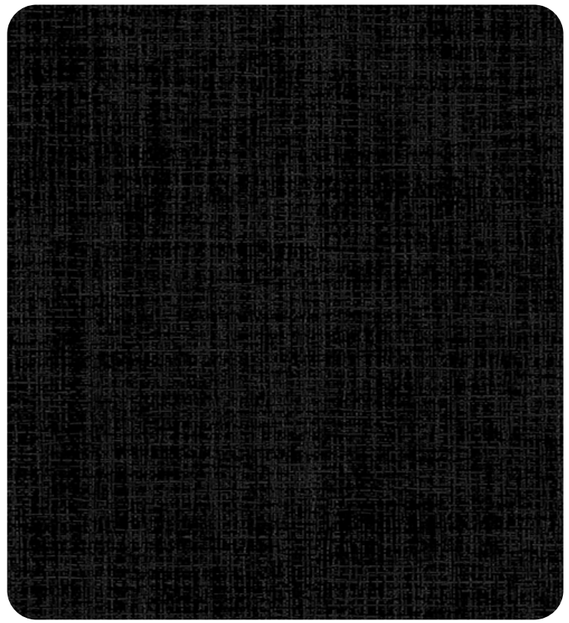


BLACK 0-004-56-00698



SAND 0-004-56-00398

STUCCO-8%

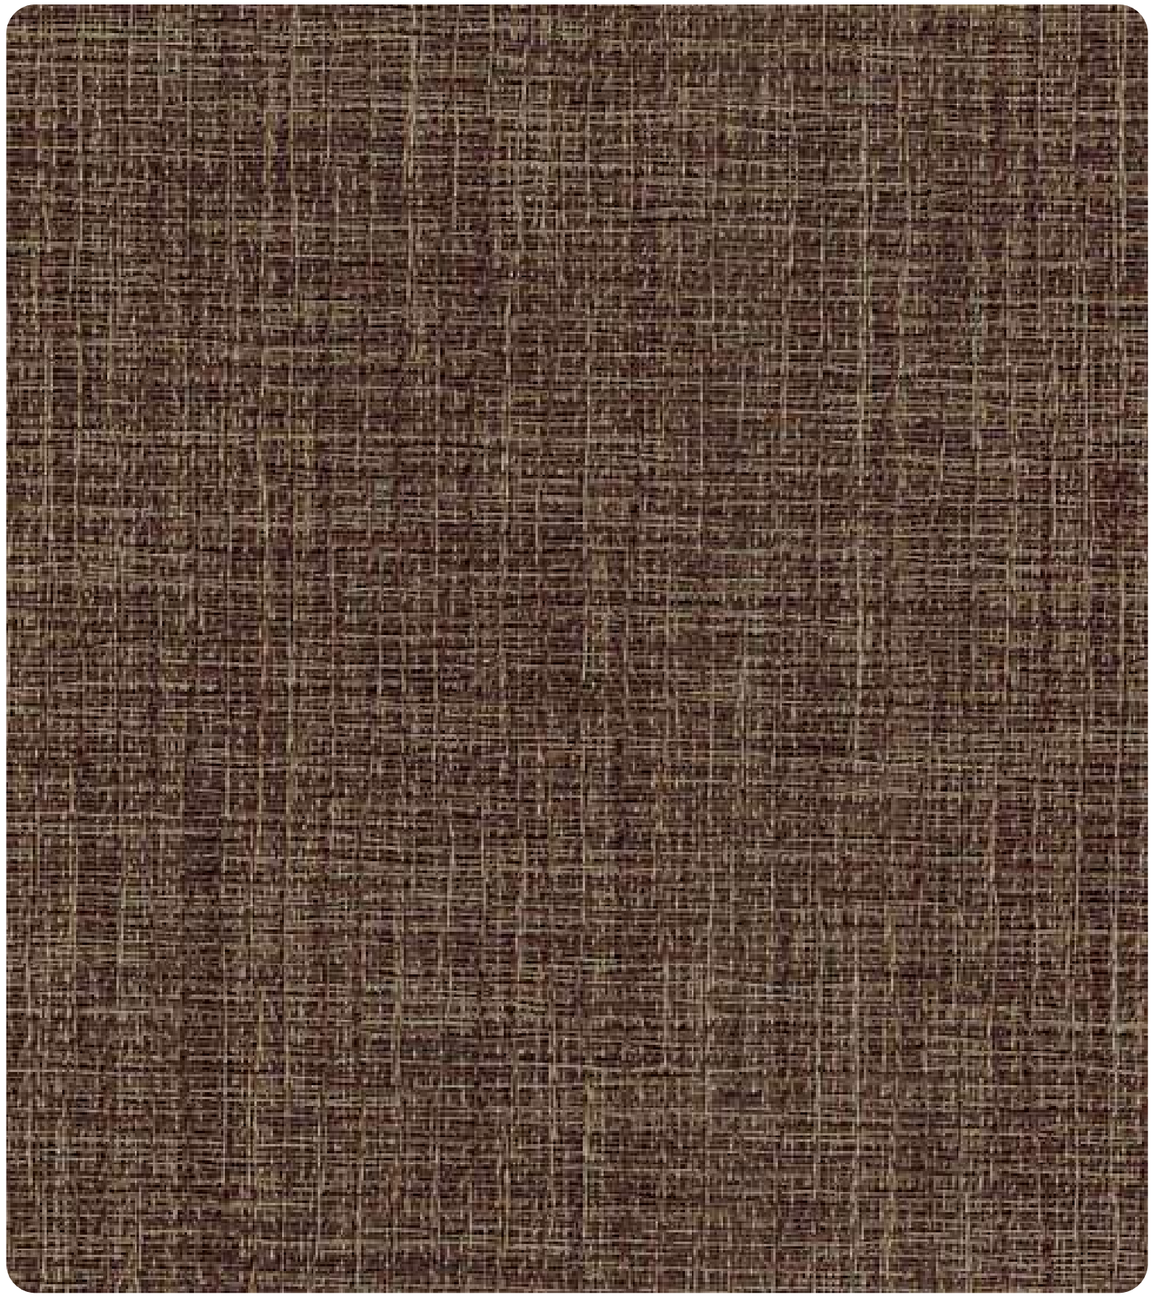

COFFEE 0-004-56-00498

VX SCREEN
STUCCO-8%

VERTILUX
IDEAS PARA TU ESPACIO

TECHNICAL PROPERTIES

Composition	30% PES + 70% PVC
Weight	405 g/m² (± 5%) | 11.94 oz/yd² (± 5%)
Thickness	0.70 mm (± 5%) | 0.028 in (± 5%)
Yarn Diameter	Warp: 0.32 mm | Fill: 0.32 mm
Roll Width	2.5 m | 98 in
Roll Length	30 m | 32.81 yd
Openness Factor	~ 8%
UV Blockage	~ 92%
Mesh/in	Warp: 52 | Fill: 44
Light Fastness	Class 4 - 5
Tensile Strength	Warp: 131 daN/5cm (± 100) | Weft: 114 daN/5cm (± 100)
Tearing Strength	Warp: 21 daN (± 30) | Weft: 15 daN (± 30)
Flame Retardant	NFPA 701

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)	Tv(%)
Ash	07	17	76	08
Black	08	14	78	09
Coffee	08	19	73	10
Linen	11	31	58	10
Sand	12	24	64	11
White	25	44	31	22

CARE & MAINTENANCE

1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING

Use Only on Roll Direction

COLD

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS

The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS

Roller Shades

Sliding Panels

Indoor Use Only



IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

VERTILUX
IDEAS PARA TU ESPACIO

VX SCREEN

Vertilux México


Copyright © 2022. Todos los derechos reservados.



3000 BLACKOUT

VX SCREEN


3000 BLACKOUT

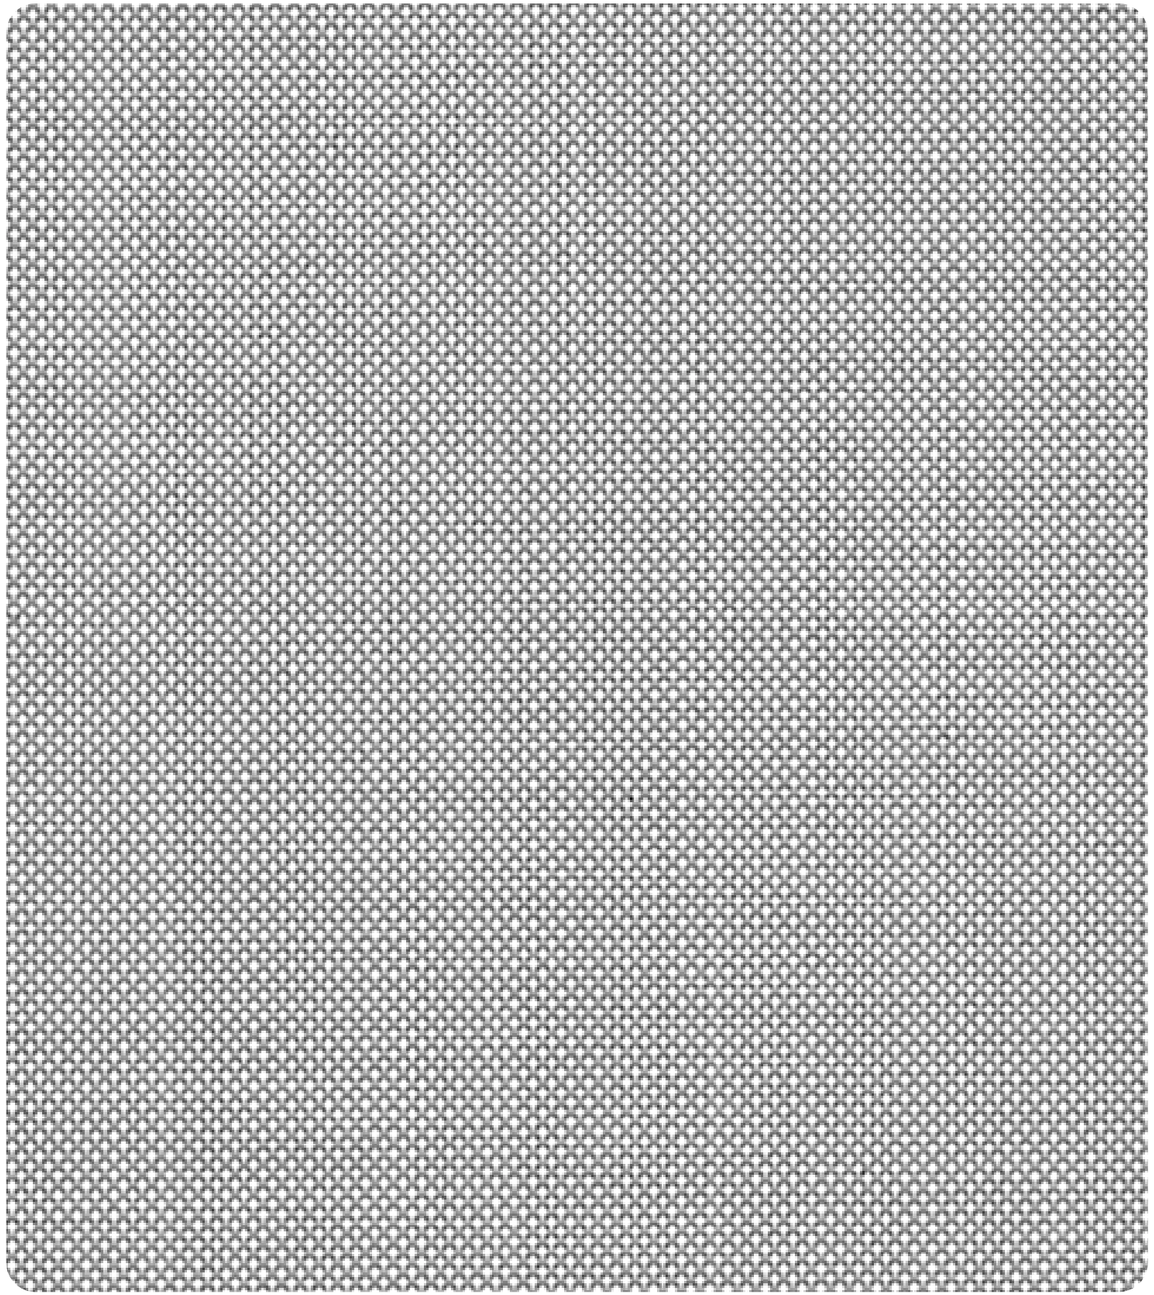

WHITE PEARL 0-004-38-27098 | 27118

3000 BLACKOUT

WHITE 0-004-38-02098 | 02118

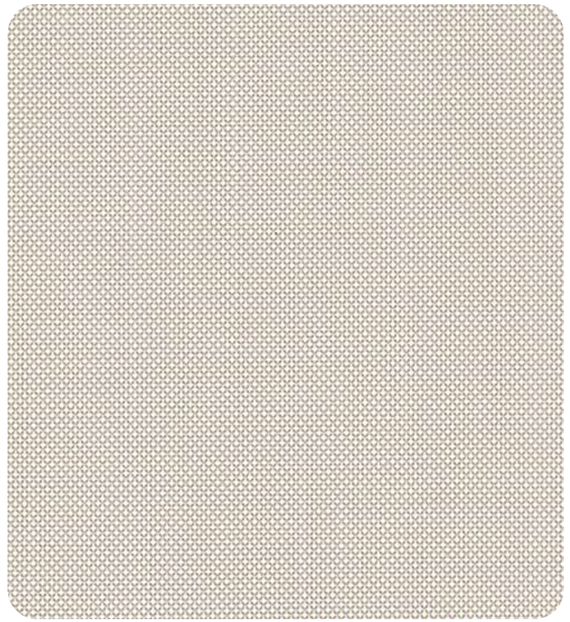

WHITE LINEN 0-004-38-22098 | 22118

INICIO

VX SCREEN

3000 BLACKOUT

VERTILUX
IDEAS FOR YOUR SPACE

TECHNICAL PROPERTIES

Composition	50% PVC + 22% PES + 28% Foam Backing
Weight	580 g/m² (± 5%) | 17.11 oz/yd² (± 5%)
Thickness	0.58 mm (± 5%) | 0.023 in (± 5%)
Yarn Diameter	Warp: 0.32 mm | Fill: 0.32 mm
Roll Width	2.5 m & 3.0 m | 98 in & 118 in
Roll Length	27.43 m | 30 yd
Openness Factor	0%
UV Blockage	100%
Mesh/in	Warp: 50 | Fill: 46
Light Fastness	Class 4 - 5
Tensile Strength	Warp: 1380 daN/5cm (± 100) | Weft: 1260 daN/5cm (± 100)
Tearing Strength	Warp: 150 daN (± 30) | Weft: 130 daN (± 30)
Flame Retardant	NFPA 701

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)	Tv(%)
White	00	65	35	00
White Linen	00	64	36	00
White Pearl	00	70	30	00

CARE & MAINTENANCE

1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING

Use Only on Roll Direction

COLD

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS

The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS

Roller Shades

Sliding Panels

Indoor Use Only

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.






3000-1%


VX SCREEN

3000-1%

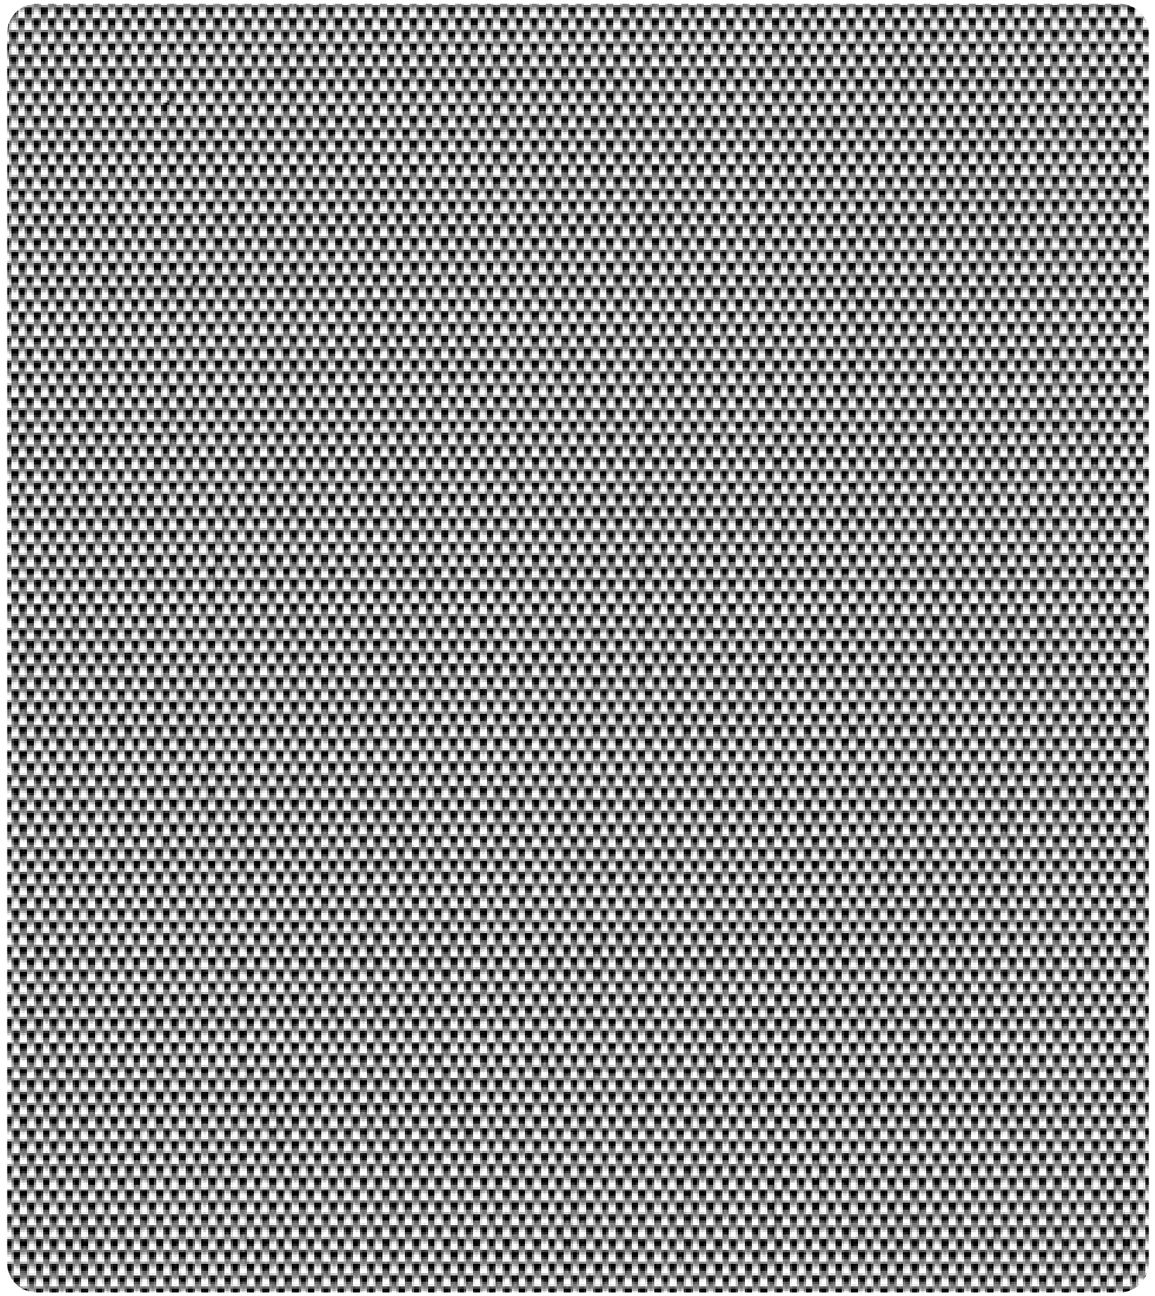


EBONY PEARL 0-004-86-20078 | 20098 | 20018


3000-1%

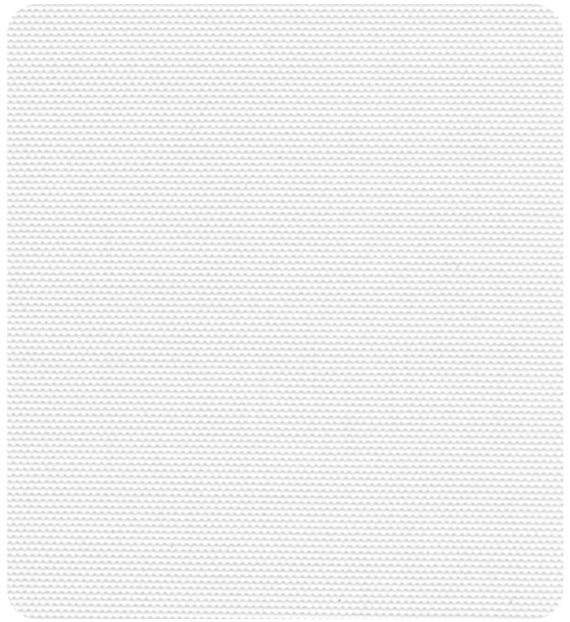


WHITE 0-004-86-00298 | 00218

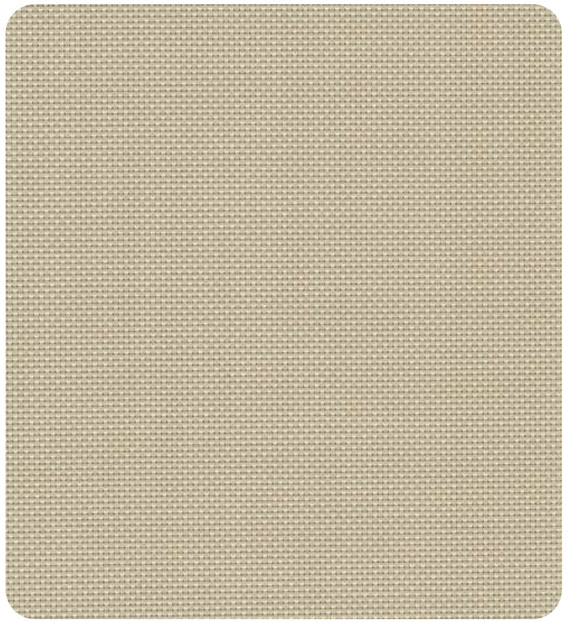

LINEN 0-004-86-00378 | 00398 | 00318

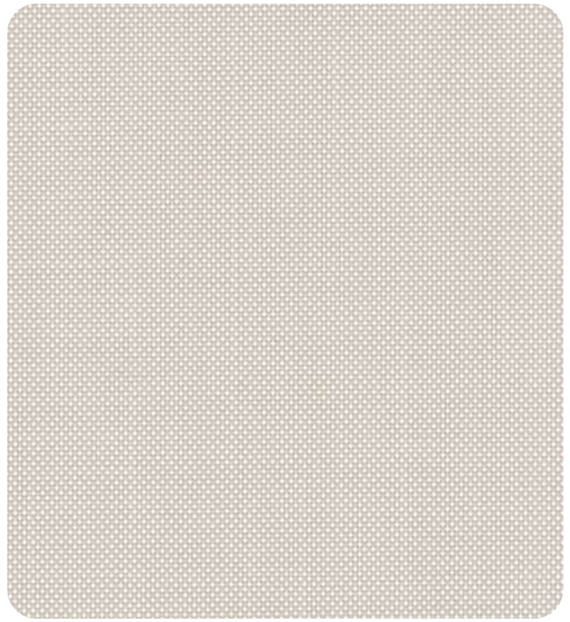


WHITE LINEN 0-004-86-22098 | 22018

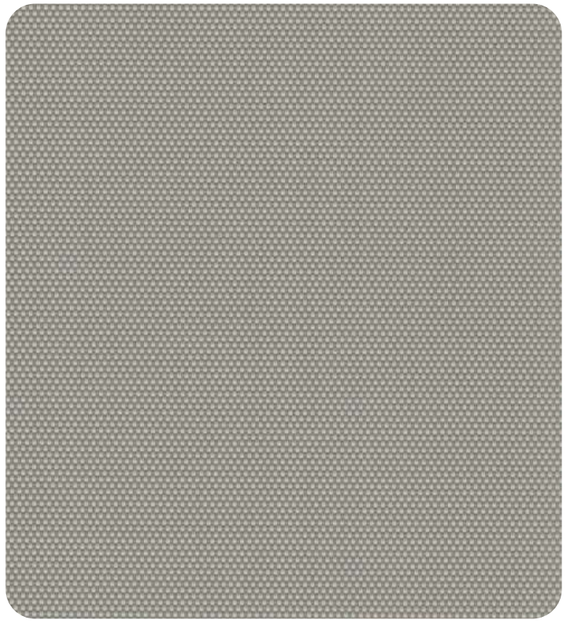


TAUPE 0-004-86-07078 | 07098 | 07018


3000-1%

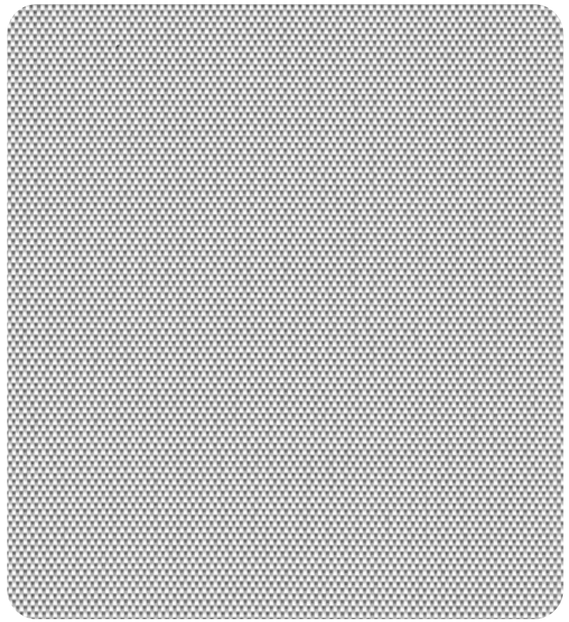


WHITE PEARL 0-004-86-02798 | 02718

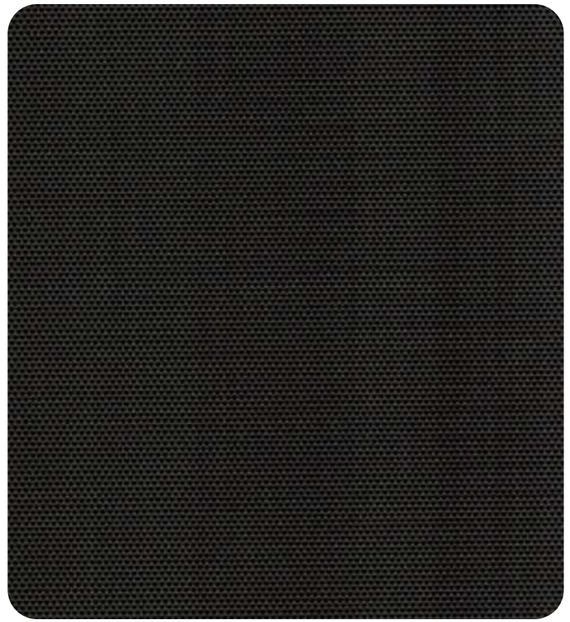

BROWN CHOCOLATE 0-004-86-02598 | 02518

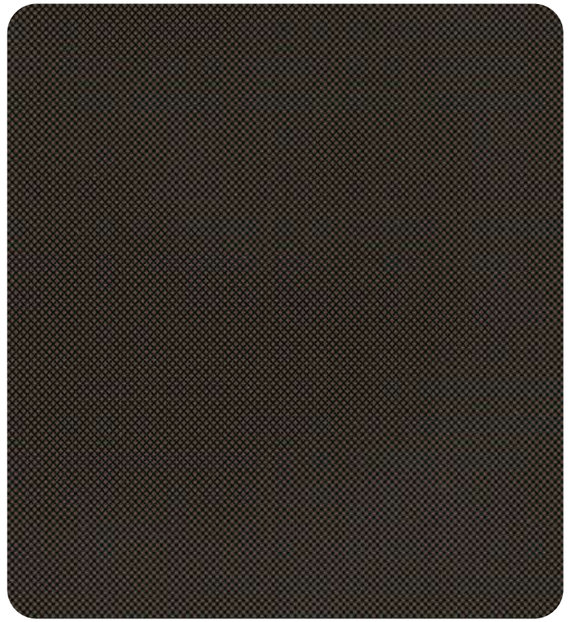

CHESTNUT 0-004-86-18378 | 18398 | 18318

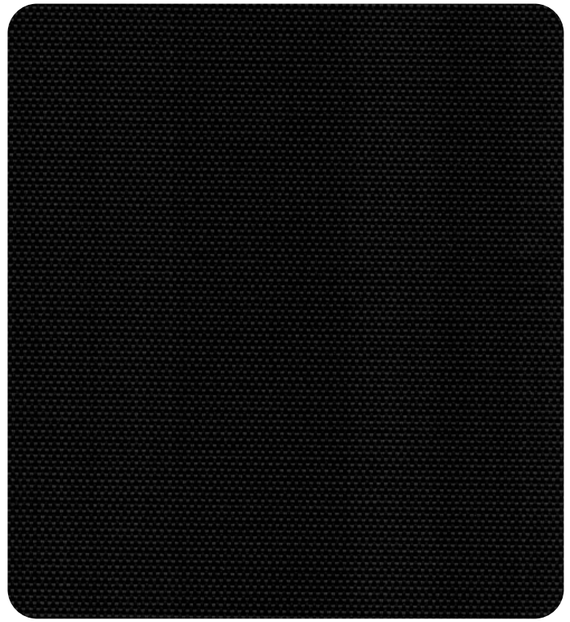

EBONY 0-004-86-01998 | 01918

VX SCREEN
3000-1%

VERTILUX
IDEAS PARA TU ESPACIO

TECHNICAL PROPERTIES

Composition	30% PES + 70% PVC
Weight	480 g/m² (± 5%) | 14.16 oz/yd² (± 5%)
Thickness	0.62 mm (± 5%) | 0.024 in (± 5%)
Yarn Diameter	0.32 mm
Roll Width	2.5 m & 3.0 m | 98 in & 118 in
Roll Length	30 m | 32.81 yd
Openness Factor	~ 1%
UV Blockage	~ 99%
Mesh/in	Warp: 62 | Fill: 40
Light Fastness	Class 4 - 5
Tensile Strength	Warp: 176 daN/5cm (± 100) | Weft: 119 daN/5cm (± 100)
Tearing Strength	Warp: 21 daN (± 30) | Weft: 13 daN (± 30)
Flame Retardant	NFPA 701

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)	Tv(%)
Brown Chocolate	02	07	91	02
Chestnut	06	04	90	04
Ebony	04	03	93	02
Ebony Pearl	02	10	88	02
Linen	16	45	39	17
Taupe	07	42	49	05
White	19	66	15	15
White Linen	16	59	25	12
White Pearl	10	47	43	08

CARE & MAINTENANCE

1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING

Can be Railroaded

COLD

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS

The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS

Roller Shades

Sliding Panels

Indoor Use Only

Visita nuestro blog
Ideas para tu espacio
Ir ahora ►

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

VERTILUX
IDEAS PARA TU ESPACIO

VX SCREEN

Vertilux México


Copyright © 2022. Todos los derechos reservados.



3000-3%

VX SCREEN


3000-3%

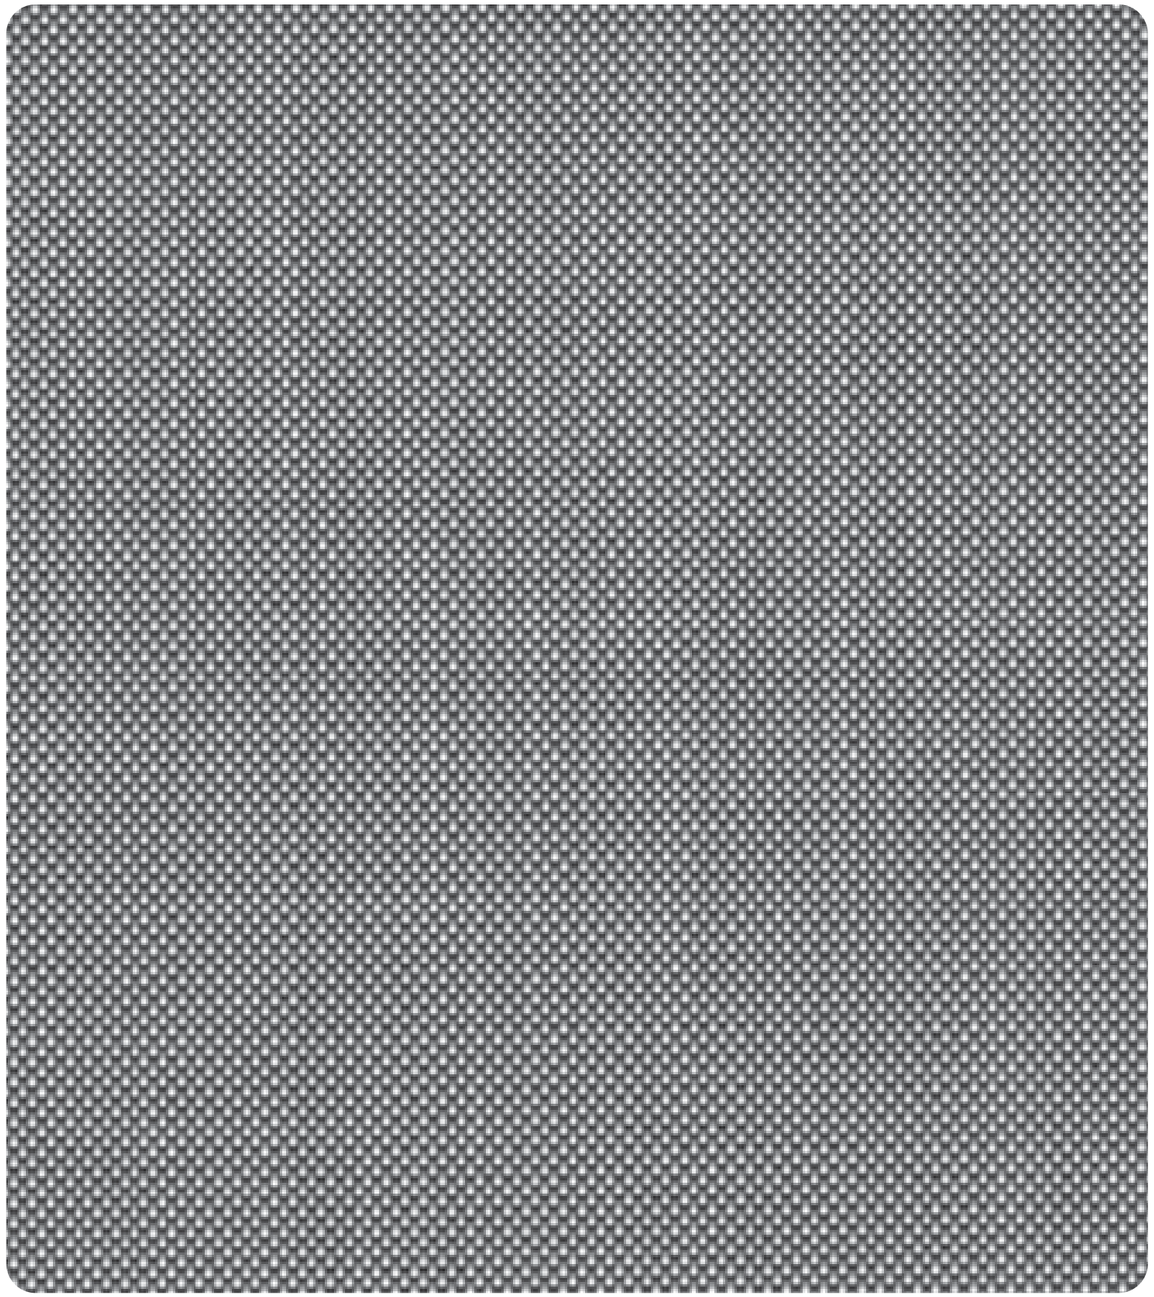


EBONY PEARL 0-004-87-20078 | 20098 | 20018

3000-3%


WHITE 0-004-87-00298 | 00218

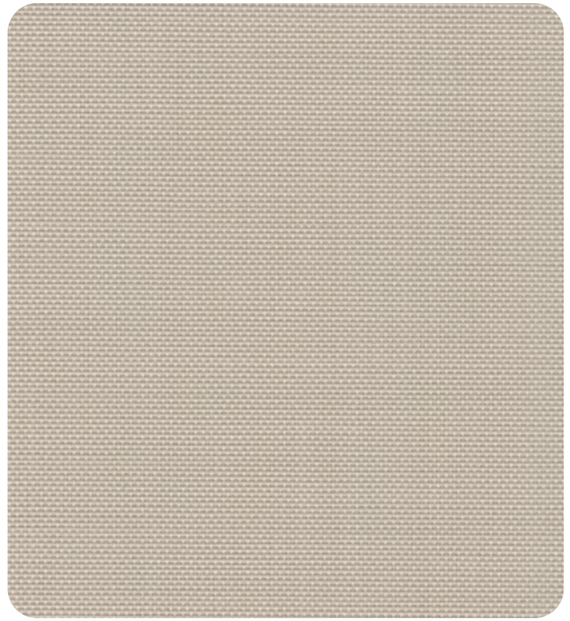

LINEN 0-004-87-00378 | 00398 | 00318

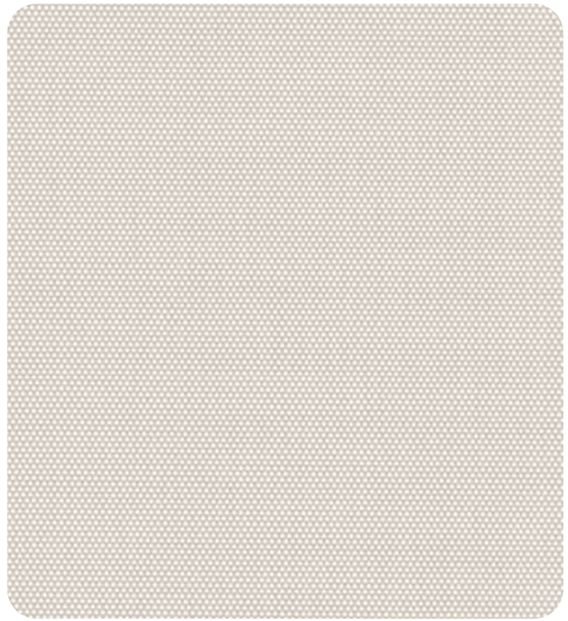


WHITE LINEN 0-004-87-22098

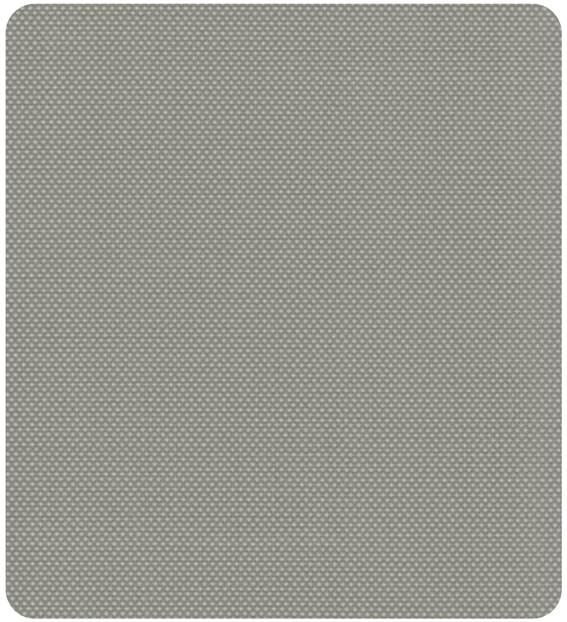


TAUPE 0-004-87-07078 | 07098 | 07018


3000-3%

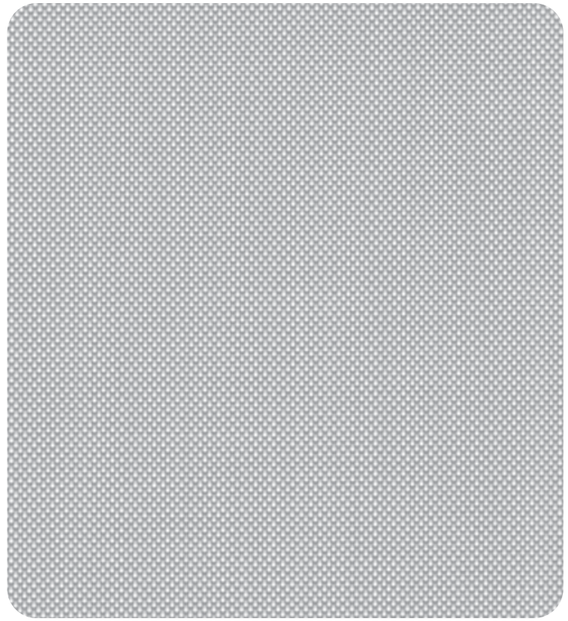


WHITE PEARL 0-004-87-02798 | 02718

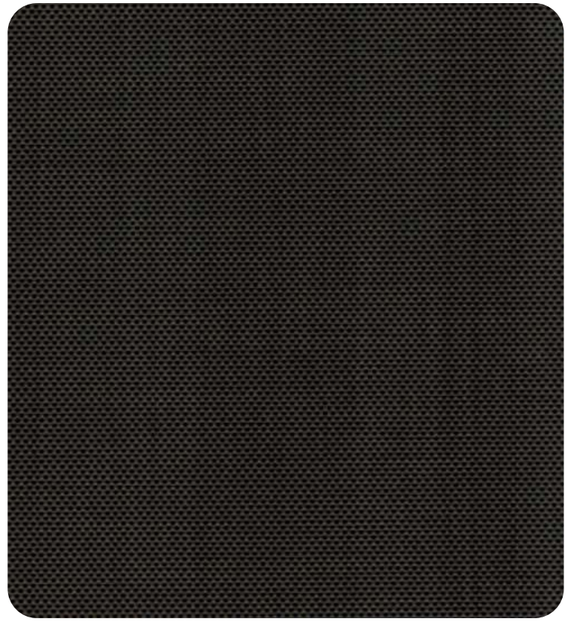

BROWN CHOCOLATE 0-004-87-02598

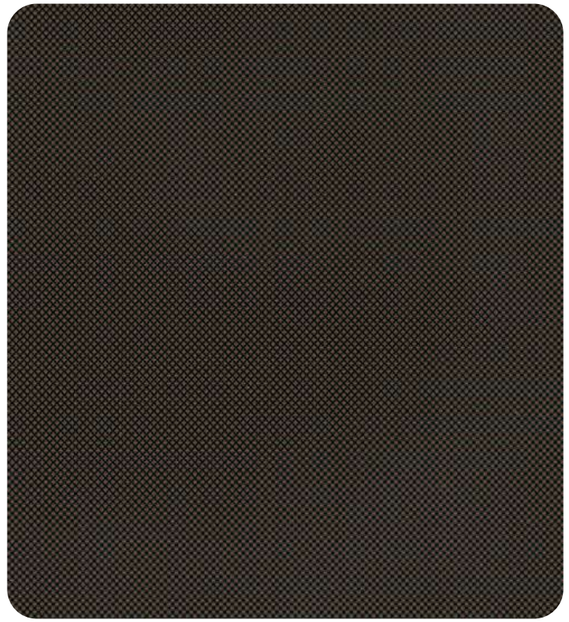

CHESTNUT 0-004-87-18378 | 18398 | 18318

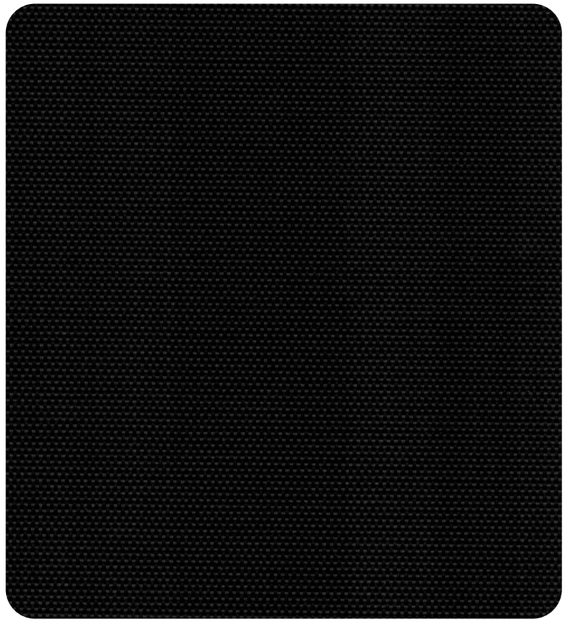

EBONY 0-004-87-01998

VX SCREEN
3000-3%

VERTILUX
IDEAS PARA TU ESPACIO

TECHNICAL PROPERTIES

Composition	30% PES + 70% PVC
Weight	440 g/m² (± 5%) | 12.98 oz/yd² (± 5%)
Thickness	0.60 mm (± 5%) | 0.024 in (± 5%)
Yarn Diameter	0.32 mm
Roll Width	2.5 m & 3.0 m | 98 in & 118 in
Roll Length	30 m | 32.81 yd
Openness Factor	~ 3%
UV Blockage	~ 97%
Mesh/in	Warp: 56 | Fill: 44
Light Fastness	Class 4 - 5
Tensile Strength	Warp: 158 daN/5cm | Weft: 118 daN/5cm
Tearing Strength	Warp: 17 daN | Weft: 12.5 daN
Flame Retardant	NFPA 701

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)	Tv(%)
Brown Chocolate	04	07	89	04
Chestnut	07	05	88	05
Ebony	04	04	92	04
Ebony Pearl	04	10	86	04
Linen	15	42	43	12
Taupe	08	40	52	06
White	21	65	14	19
White Linen	18	57	25	15
White Pearl	10	41	49	10

CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING



Can be Railroaded

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS



Roller Shades

Sliding Panels

Indoor Use Only



IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

VERTILUX
IDEAS PARA TU ESPACIO

VX SCREEN

Vertilux México


Copyright © 2022. Todos los derechos reservados.



3000-10%

VX SCREEN


3000-10%

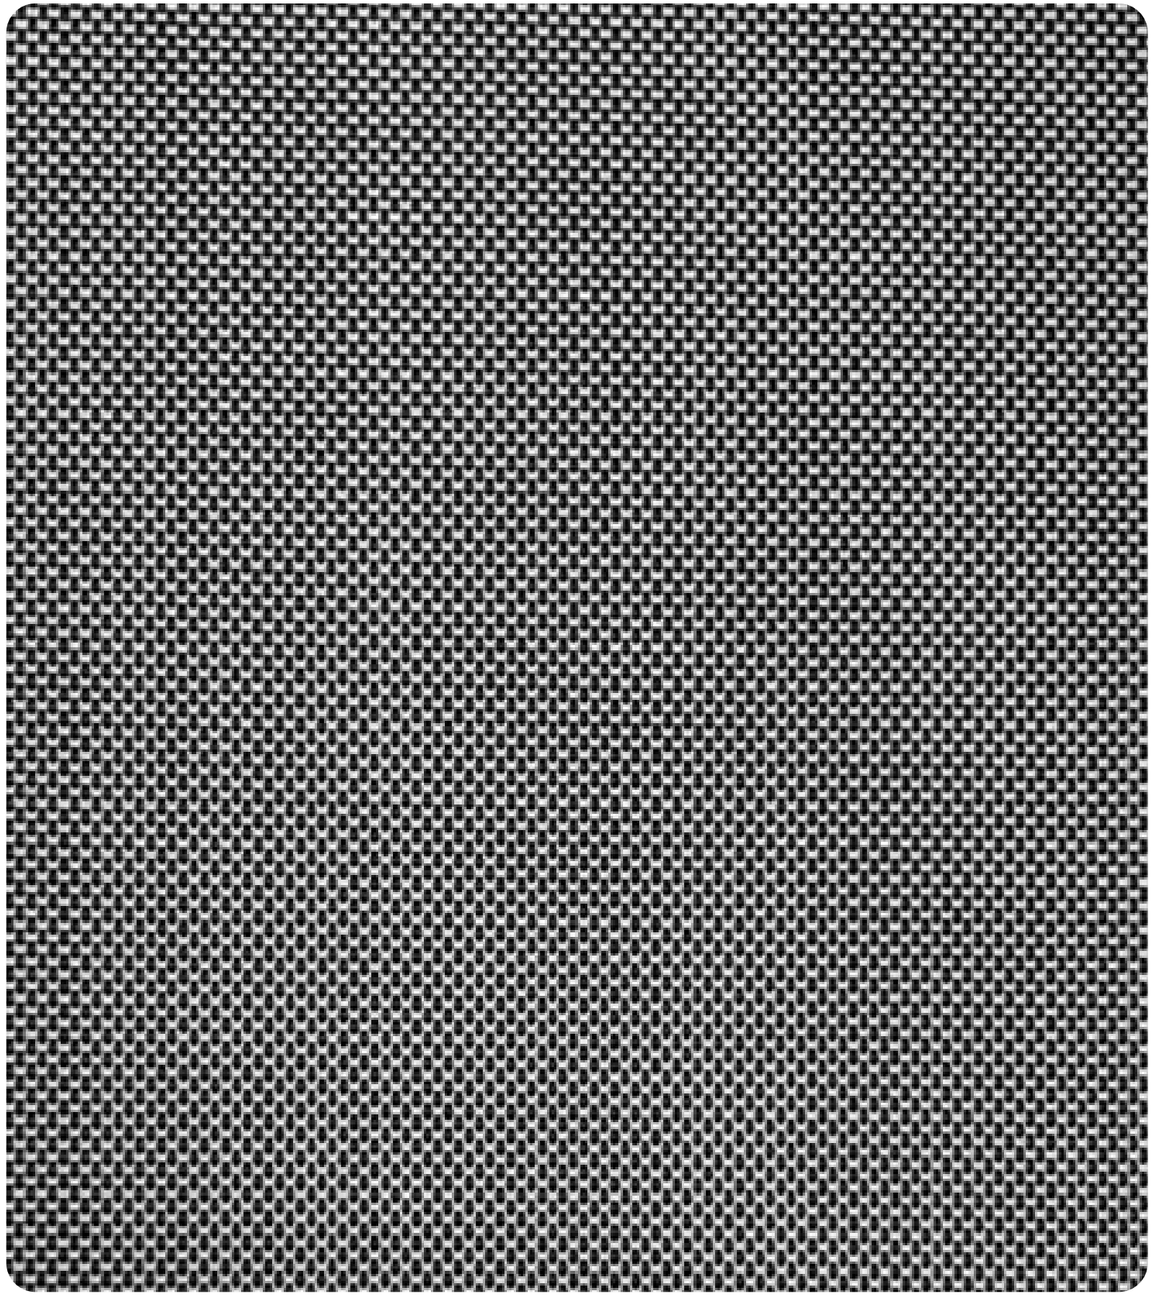


EBONY PEARL 0-004-61-20078 | 20098 | 20018

3000-10%


WHITE 0-004-61-00278 | 00298 | 02118

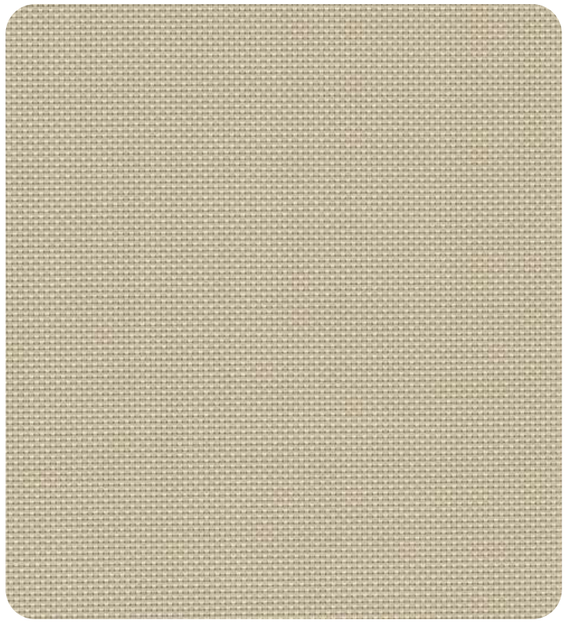

LINEN 0-004-61-00378 | 00398 | 00318

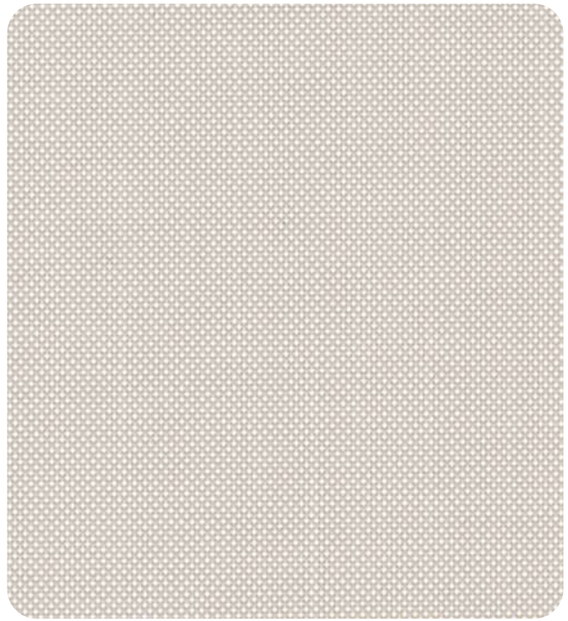


WHITE LINEN 0-004-61-22078 | 22098 | 22118

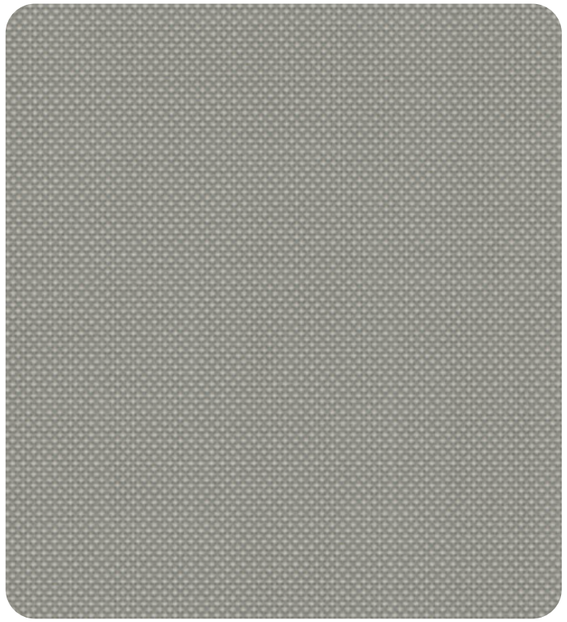


TAUPE 0-004-61-07078 | 07098 | 07018


3000-10%

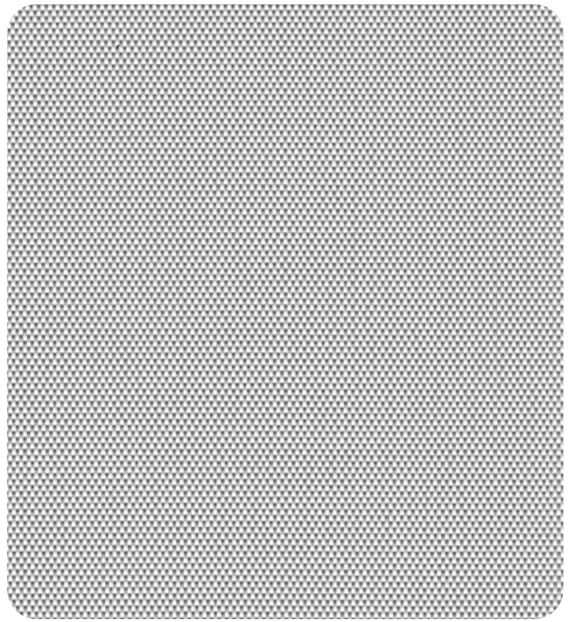


WHITE PEARL 0-004-61-02778 | 02798 | 02718

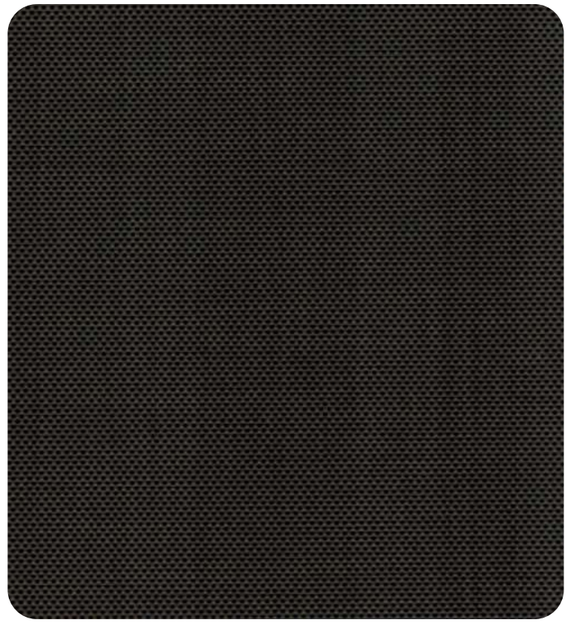

BROWN CHOCOLATE 0-004-61-02578 | 02598 | 25118

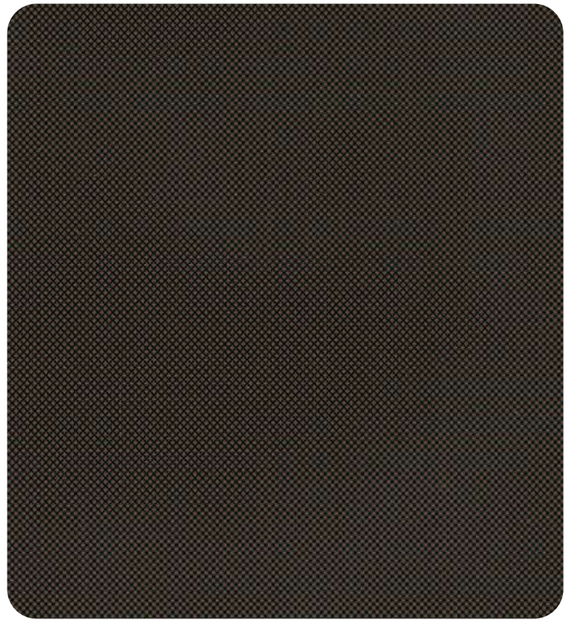

CHESTNUT 0-004-61-18378 | 18398 | 18318

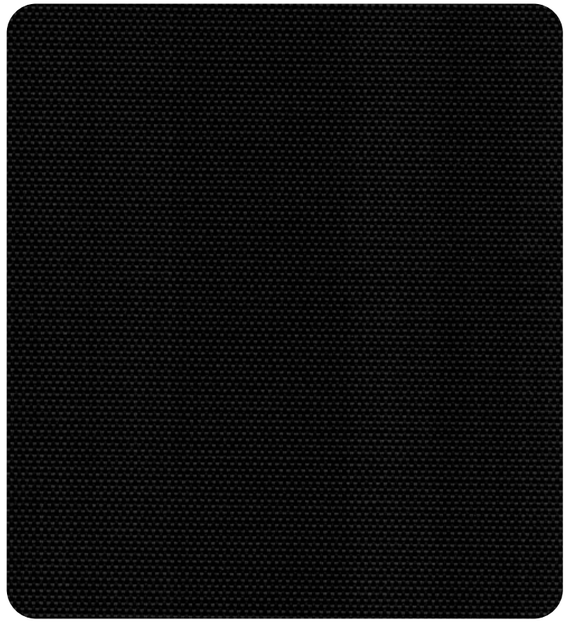

EBONY 0-004-61-01998 | 19118

VX SCREEN
3000-10%

VERTILUX
IDEAS PARA TU ESPACIO

TECHNICAL PROPERTIES

Composition	30% PES + 70% PVC
Weight	410 g/m² (± 5%) | 12.09 oz/yd² (± 5%)
Thickness	0.57 mm (± 5%) | 0.022 in (± 5%)
Yarn Diameter	0.32 mm
Roll Width	2.5 m | 98 in
Roll Length	30 m | 32.81 yd
Openness Factor	~ 10%
UV Blockage	~ 90%
Mesh/in	Warp: 48 | Fill: 44
Light Fastness	Class 4 - 5
Tensile Strength	Warp: 132 daN/5cm | Weft: 116 daN/5cm
Tearing Strength	Warp: 16 daN | Weft: 15 daN
Flame Retardant	NFPA 701

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)	Tv(%)
Brown Chocolate	12	06	82	13
Chestnut	13	04	83	09
Ebony	11	05	84	12
Ebony Pearl	08	06	86	13
Linen	20	45	35	17
Taupe	15	35	50	12
White	28	58	14	22
White Linen	25	52	23	20
White Pearl	21	46	33	17

CARE & MAINTENANCE

1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING

Can be Railroaded

COLD

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS

The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS

Roller Shades

Sliding Panels

Indoor Use Only

Visita nuestro blog
Ideas para tu espacio
Ir ahora ►

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

VERTILUX
IDEAS PARA TU ESPACIO

VX SCREEN

Vertilux México


Copyright © 2022. Todos los derechos reservados.



3000-5%

VX SCREEN


3000-5%

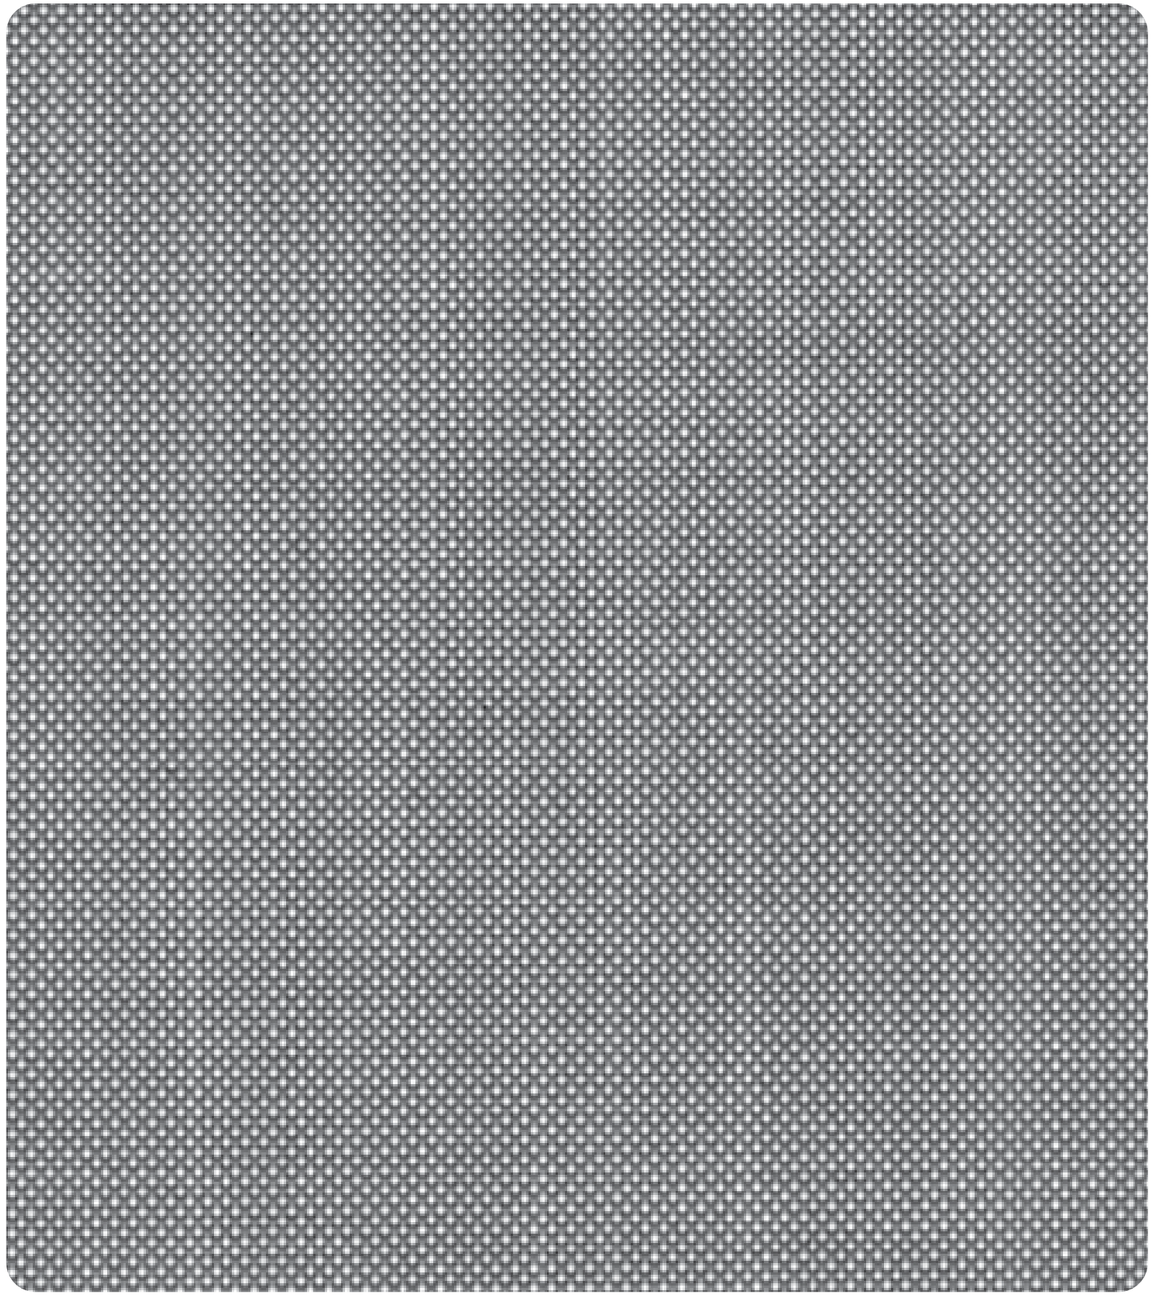


EBONY PEARL 0-004-62-20078 | 20098 | 20018

3000-5%


WHITE 0-004-62-00278 | 00298 | 00218

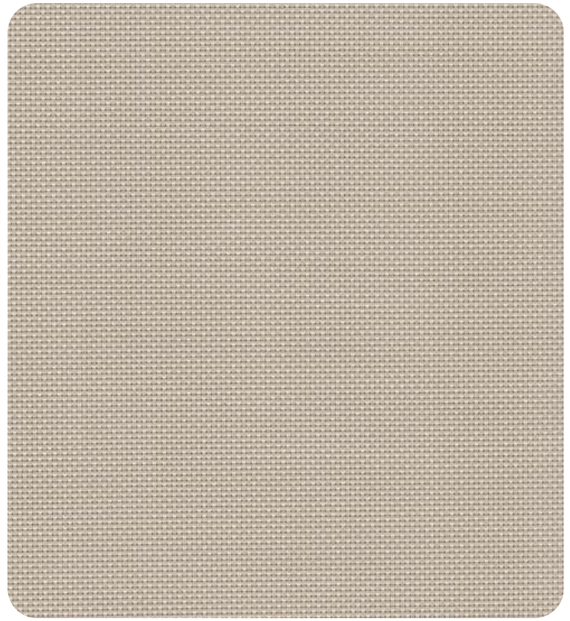

LINEN 0-004-62-00378 | 00398 | 00318

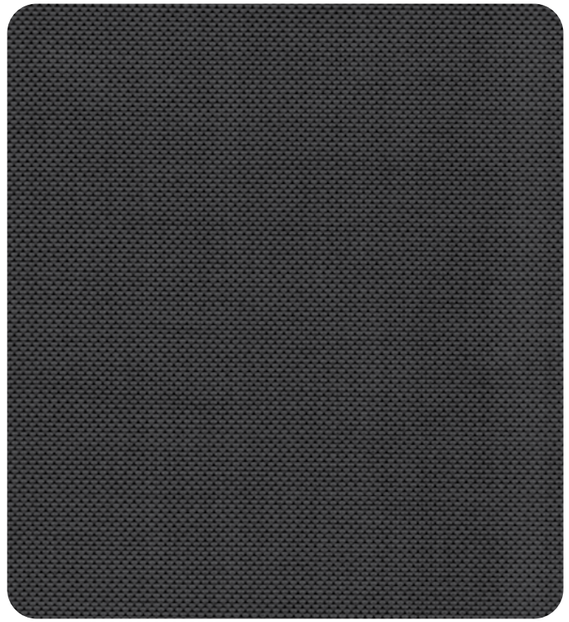


EBONY 0-004-62-01978 | 01998 | 01918

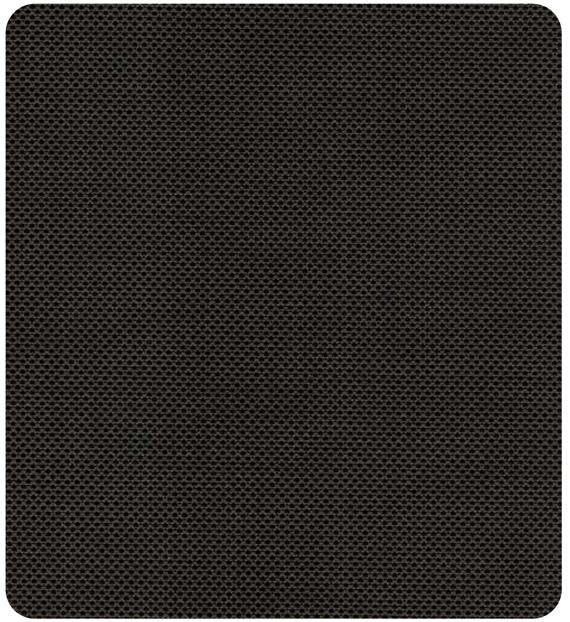


BROWN CHOCOLATE 0-004-62-02578 | 02598 | 02518


3000-5%

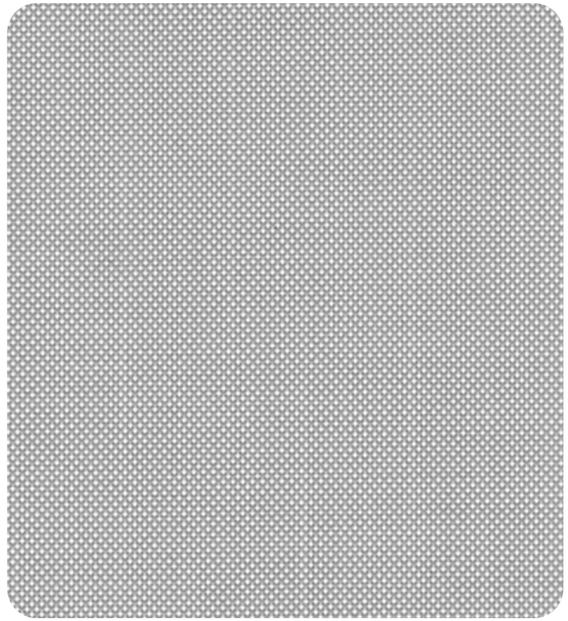


WHITE PEARL 0-004-62-02778 | 02798 | 02718

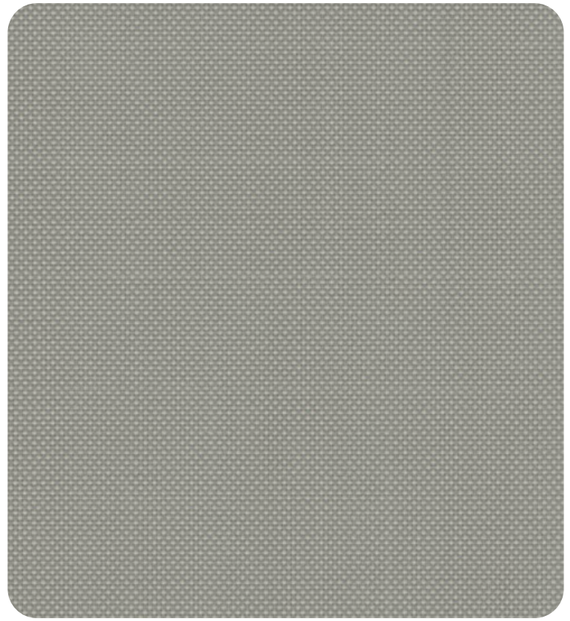

TAUPE 0-004-62-07078 | 07098 | 07018

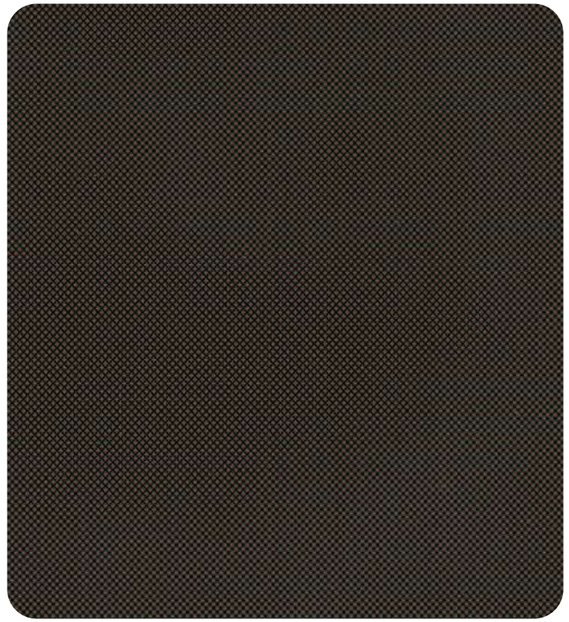

CHESTNUT 0-004-62-18378 | 18398 | 18318

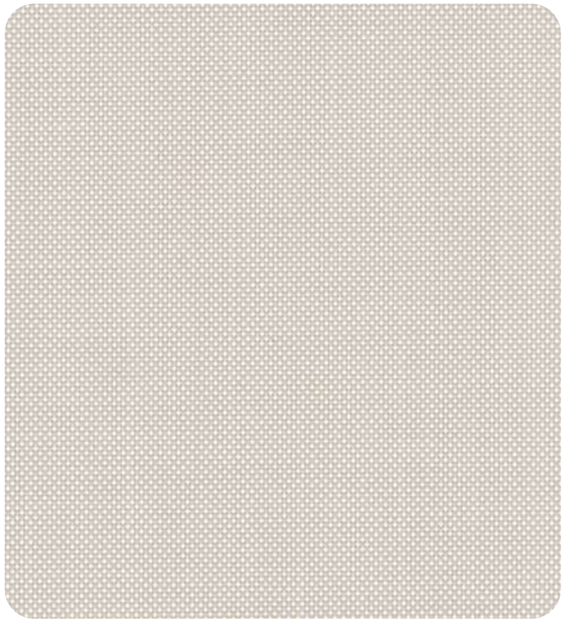

WHITE LINEN 0-004-62-22078 | 22098 | 22018

VX SCREEN
3000-5%

VERTILUX
IDEAS PARA TU ESPACIO

TECHNICAL PROPERTIES

Composition	30% PES + 70% PVC
Weight	420 g/m² (± 5%) | 12.39 oz/yd² (± 5%)
Thickness	0.58 mm (± 5%) | 0.023 in (± 5%)
Yarn Diameter	0.32 mm
Roll Width	2.5 m & 3.0 m | 98 in & 118 in
Roll Length	30 m | 32.81 yd
Openness Factor	~ 5%
UV Blockage	~ 95%
Mesh/in	Warp: 49 | Fill: 46
Light Fastness	Class 4 - 5
Tensile Strength	Warp: 137 daN/5cm | Weft: 117 daN/5cm
Tearing Strength	Warp: 16 daN | Weft: 15 daN
Flame Retardant	NFPA 701

*Performance evaluations conducted by independent laboratories.

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)	Tv(%)
Brown Chocolate	07	07	86	07
Ebony	05	05	90	06
Ebony Pearl	06	10	84	07
Linen	19	47	34	18
Taupe	12	39	49	10
White	25	62	13	25
White Linen	23	53	24	22
White Pearl	13	38	49	15

CARE & MAINTENANCE

1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING

Can be Railroaded

COLD

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS

The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS

Roller Shades

Sliding Panels

Indoor Use Only



IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

VERTILUX
IDEAS PARA TU ESPACIO

VX SCREEN

Vertilux México


Copyright © 2022. Todos los derechos reservados.



4000-5%


VX SCREEN

4000-5%

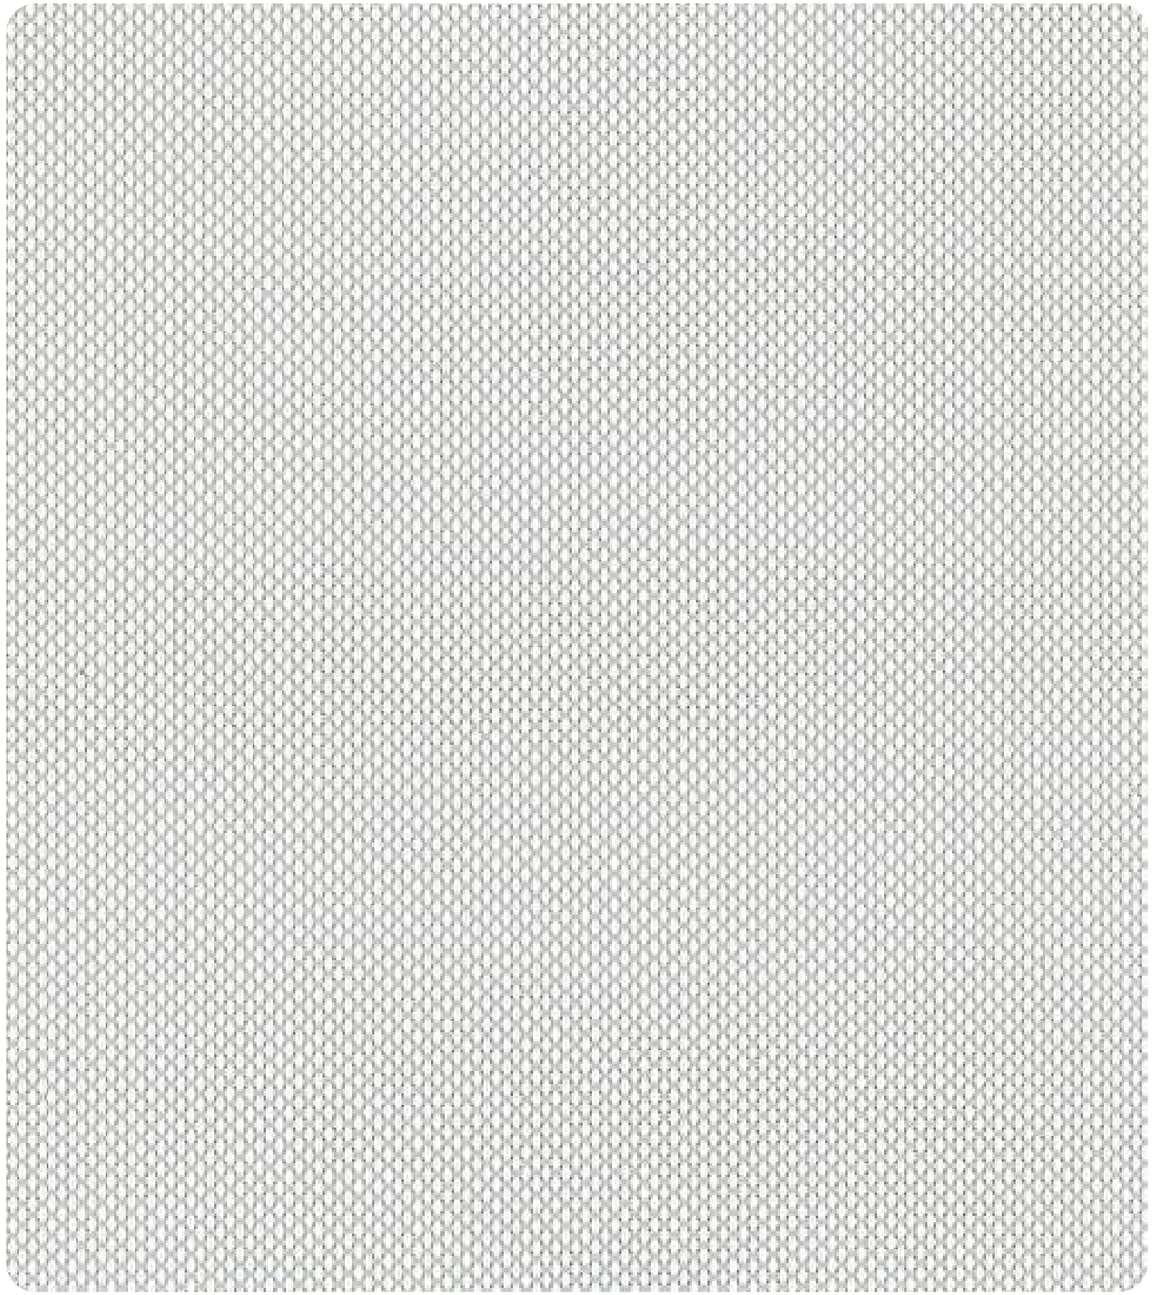


WHITE PEARL 0-004-60-02778 | 02798 | 27118

4000-5%

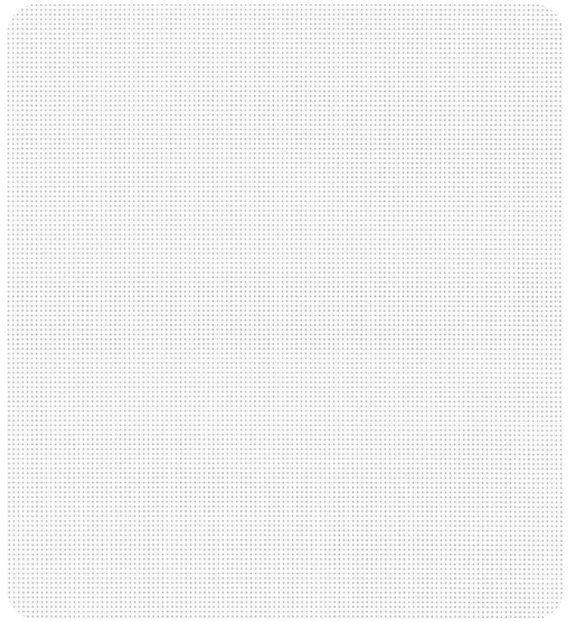


WHITE 0-004-60-00278 | 00298 | 02118

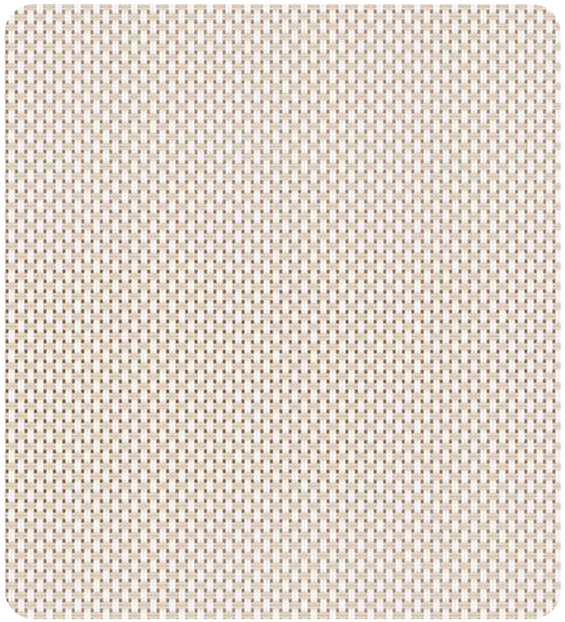

WHITE LINEN 0-004-60-22078 | 22098 | 22118




LINEN 0-004-60-00378 | 00398 | 03118

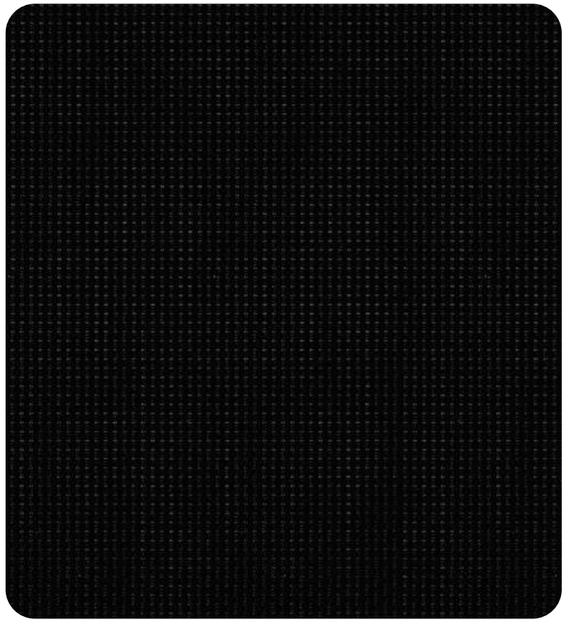


EBONY 0-004-60-01998 | 19118


4000-5%

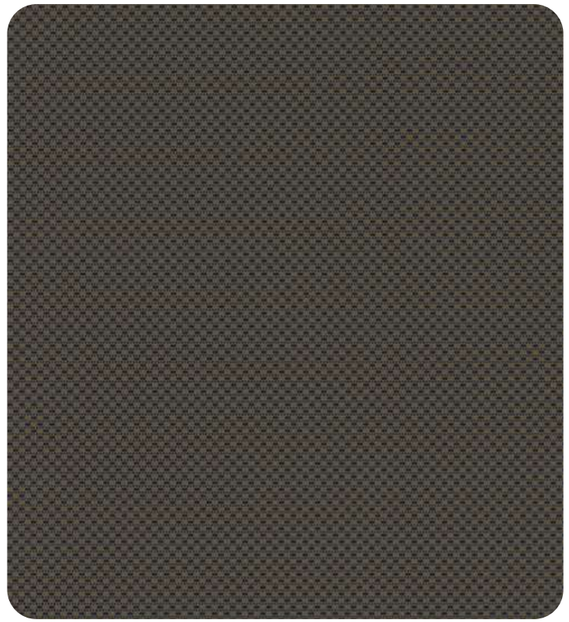

BROWN CHOCOLATE 0-004-60-02578 | 02598 | 02518

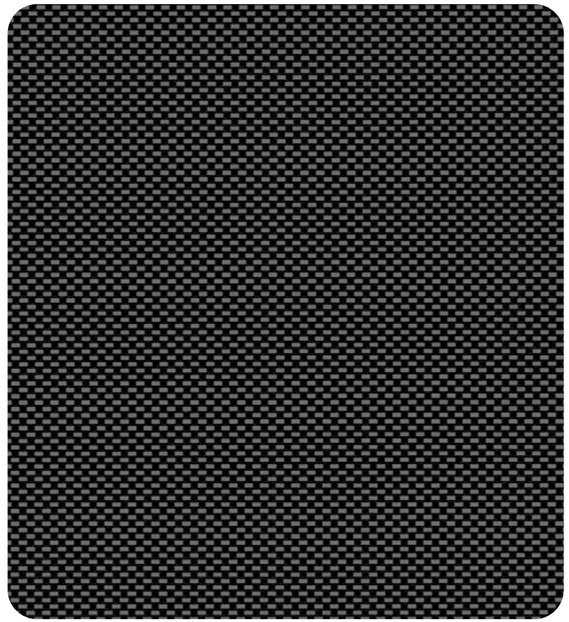

EBONY GREY 0-004-60-17078 | 17098 | 17018

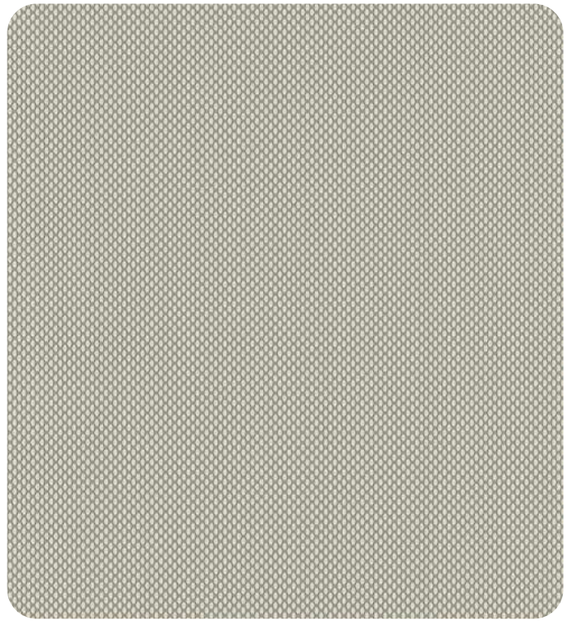

PEARL LINEN 0-004-60-72078 | 72098 | 72018

VX SCREEN
4000-5%

VERTILUX
IDEAS PARA TU ESPACIO

TECHNICAL PROPERTIES

Composition	30% PES + 70% PVC
Weight	530 g/m² (± 5%) | 15.63 oz/yd² (± 5%)
Thickness	0.64 mm (± 5%) | 0.025 in (± 5%)
Yarn Diameter	0.42 mm
Roll Width	2.5 m & 3.0 m | 98 in & 118 in
Roll Length	30 m | 32.81 yd
Openness Factor	~ 5%
UV Blockage	~ 95%
Mesh/in	Warp: 38 | Fill: 36
Light Fastness	Class 4 - 5
Tensile Strength	Warp: 226 daN/5cm (± 100) | Weft: 204 daN/5cm (± 100)
Tearing Strength	Warp: 32 daN (± 30) | Weft: 30 daN (± 30)
Flame Retardant	NFPA 701

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)	Tv(%)
Brown Chocolate	08	09	83	11
Ebony	07	04	89	10
Ebony Grey	08	06	86	10
Linen	16	49	35	11
Pearl Linen	14	52	34	11
White	22	64	14	21
White Linen	17	57	26	17
White Pearl	10	39	51	14

CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING



Use Only on Roll Direction

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS



Roller Shades

Sliding Panels

Indoor Use Only



IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

VERTILUX
IDEAS PARA TU ESPACIO

VX SCREEN

Vertilux México


Copyright © 2022. Todos los derechos reservados.



8200-3%

VX SCREEN


8200-3%

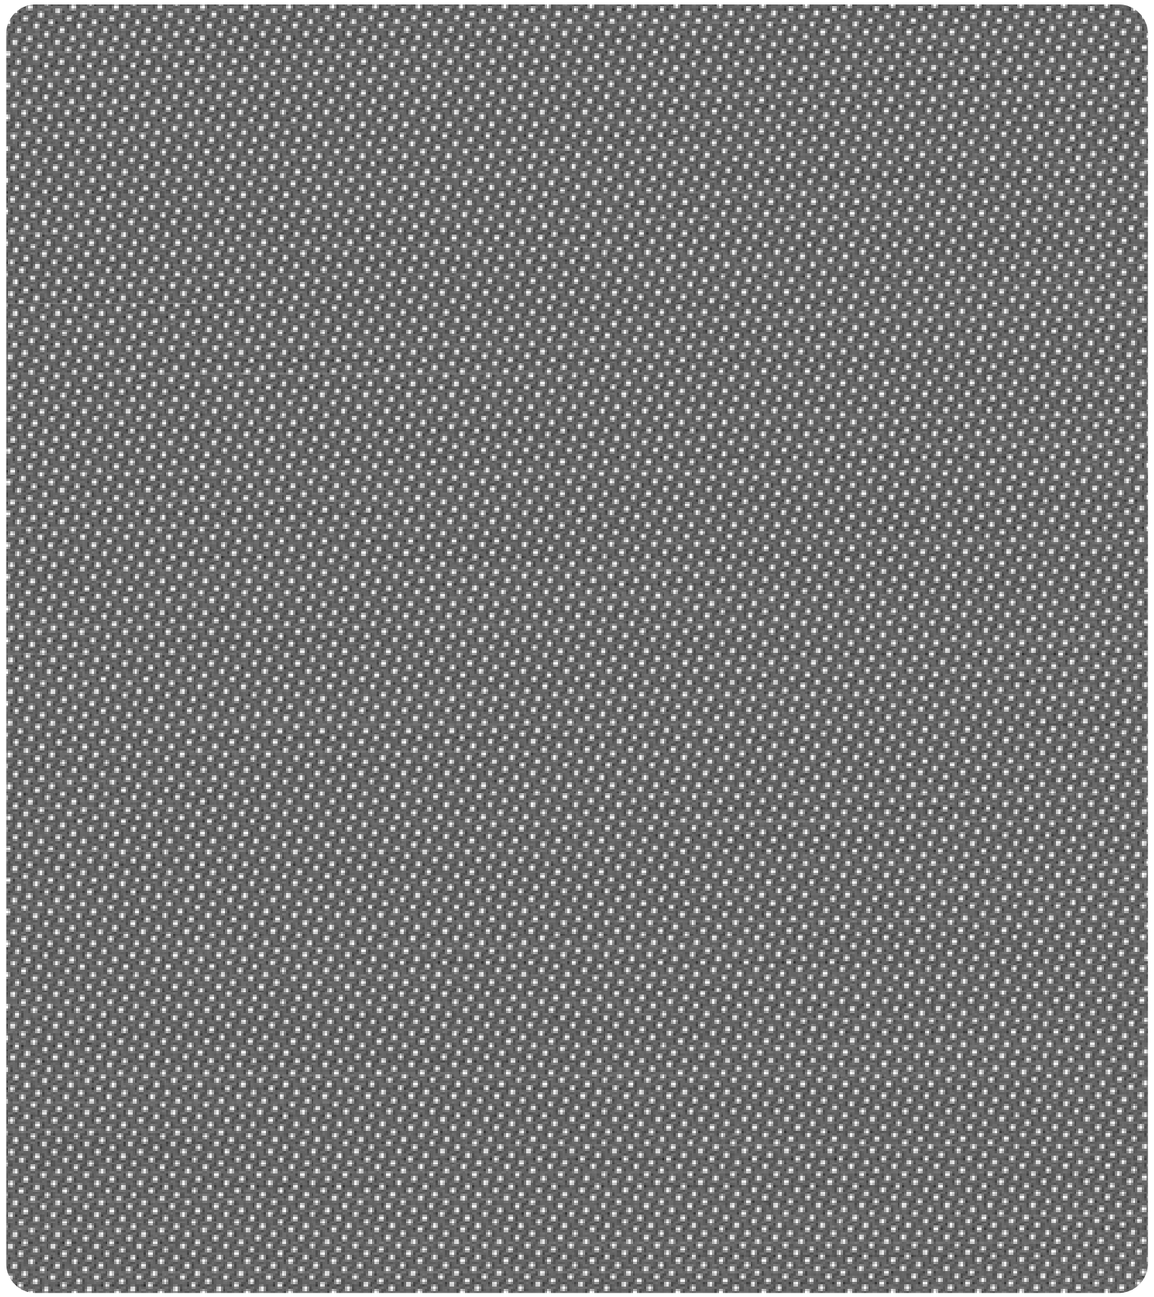

WHITE PEARL 0-004-83-02798 | 02718

8200-3%

WHITE 0-004-83-00298 | 00218

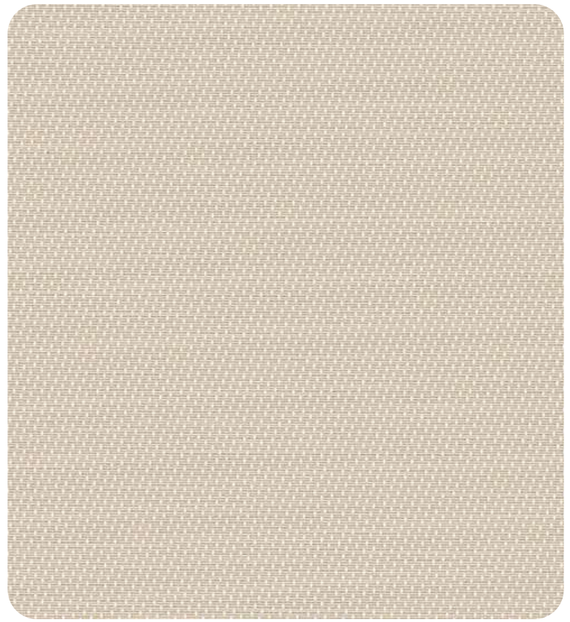

WHITE LINEN 0-004-83-82698 | 82618



EBONY WHITE 0-004-83-23098 | 23118

INICIO

VX SCREEN
8200-3%

VERTILUX
IDEAS PARA TU ESPACIO

TECHNICAL PROPERTIES

Composition	30% PES + 70% PVC
Weight	420 g/m² (± 5%) | 12.39 oz/yd² (± 5%)
Thickness	0.62 mm (± 5%) | 0.024 in (± 5%)
Yarn Diameter	Warp: 0.32 mm | Fill: 0.32 mm
Roll Width	2.5 m & 3.0 m | 98 in & 118 in
Roll Length	30 m | 32.81 yd
Openness Factor	~ 3%
UV Blockage	~ 97%
Mesh/in	Warp: 52 | Fill: 50
Light Fastness	Class 4 - 5
Tensile Strength	Warp: 145 daN/5cm | Weft: 134 daN/5cm
Tearing Strength	Warp: 26 daN | Weft: 25.5 daN
Flame Retardant	NFPA 701

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)	Tv(%)
Ebony White	12	28	60	09
White	23	63	14	19
White Linen	14	27	59	08
White Pearl	15	43	42	10

CARE & MAINTENANCE

1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING

Use Only on Roll Direction

COLD

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS

The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS

Roller Shades

Sliding Panels

Indoor Use Only

Visita nuestro blog
Ideas para tu espacio
Ir ahora ▶


IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.



320-20%


VX SCREEN

320-20%

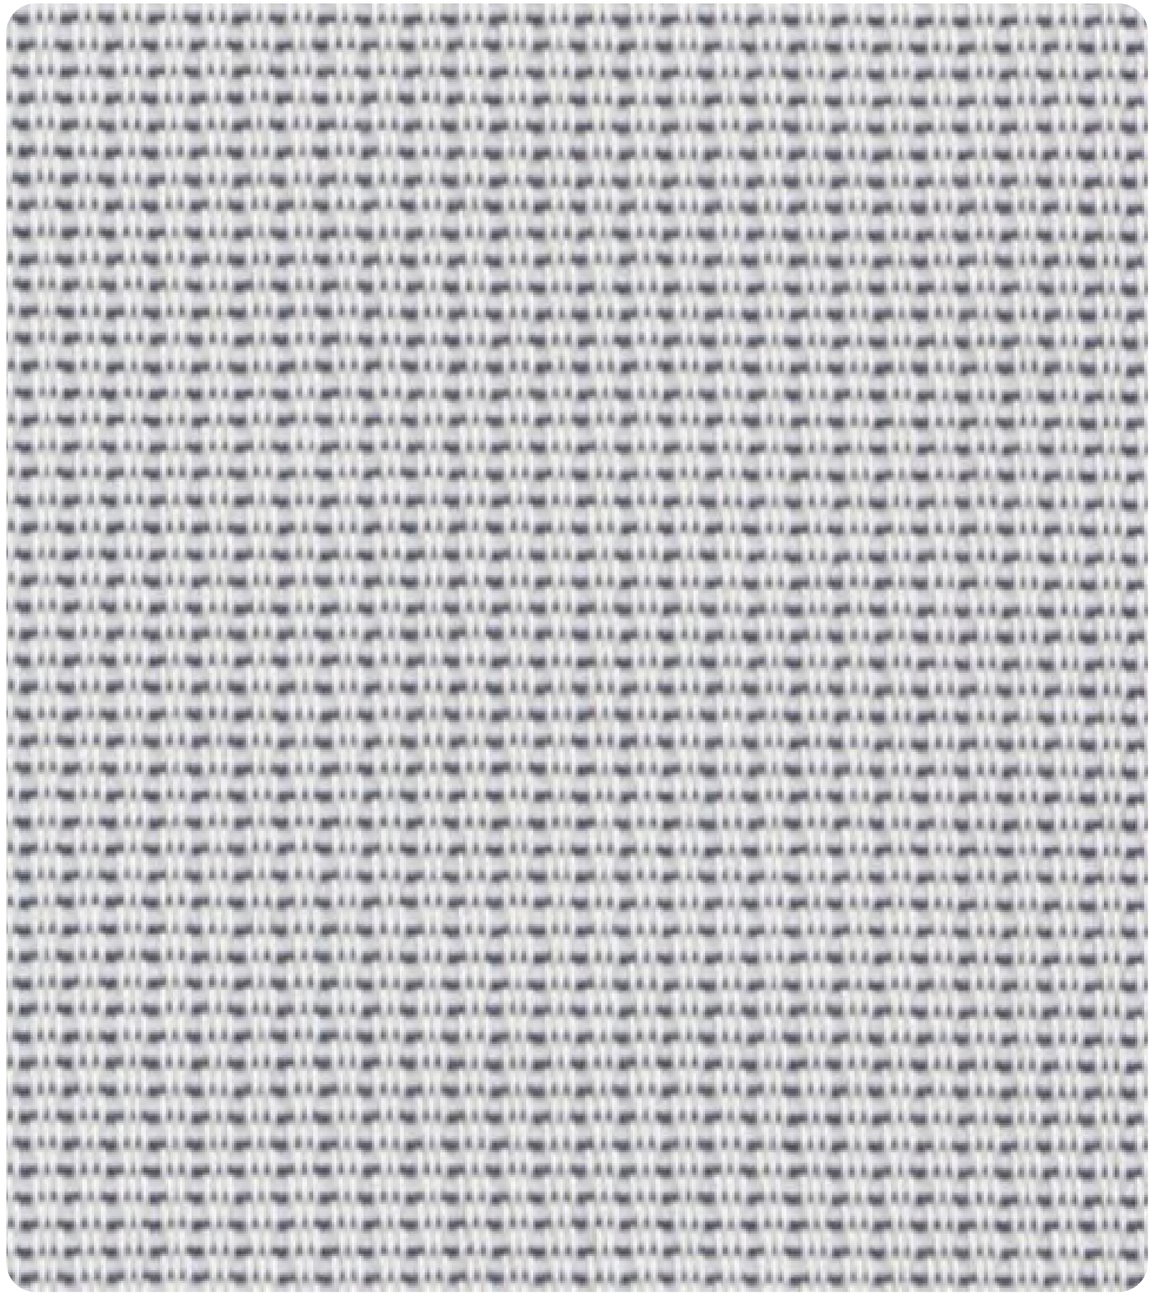

WHITE GREY 0-004-66-02198


320-20%

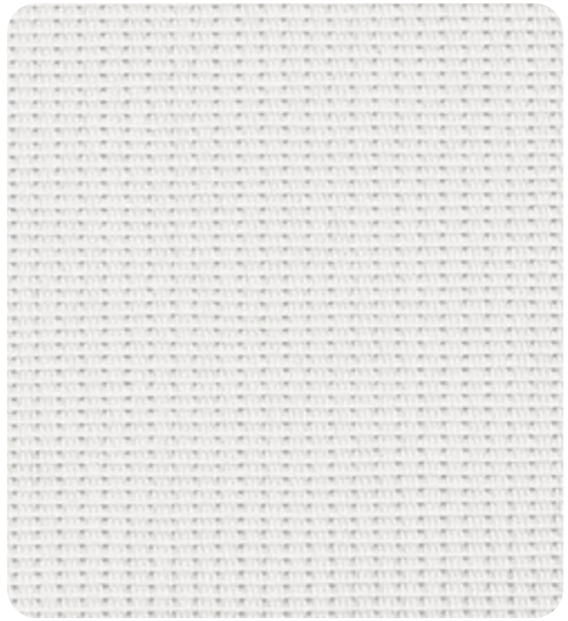


WHITE 0-004-66-00298



WHITE LINEN 0-004-66-22098

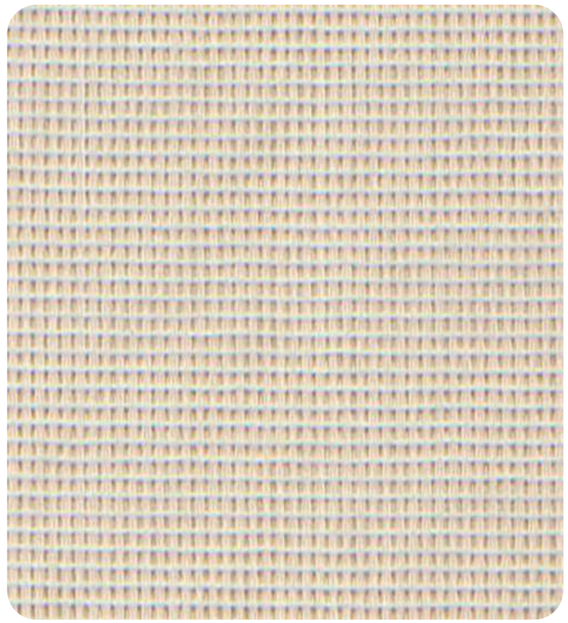


IVORY WHITE 0-004-66-00198

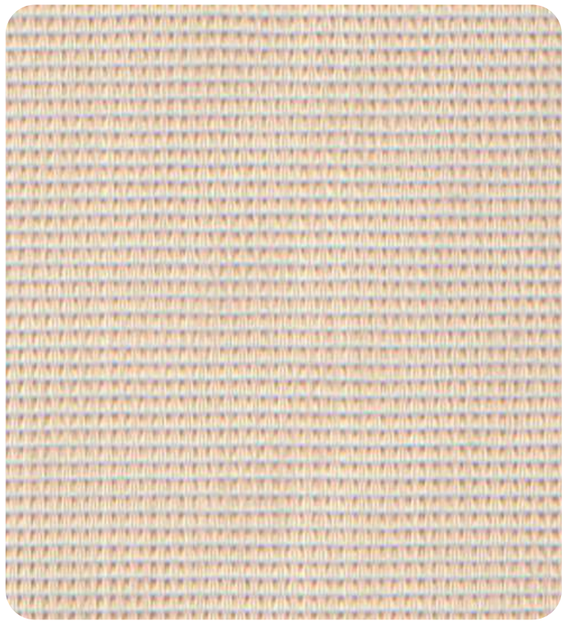

LINEN 0-004-66-00398

INICIO

320-20%

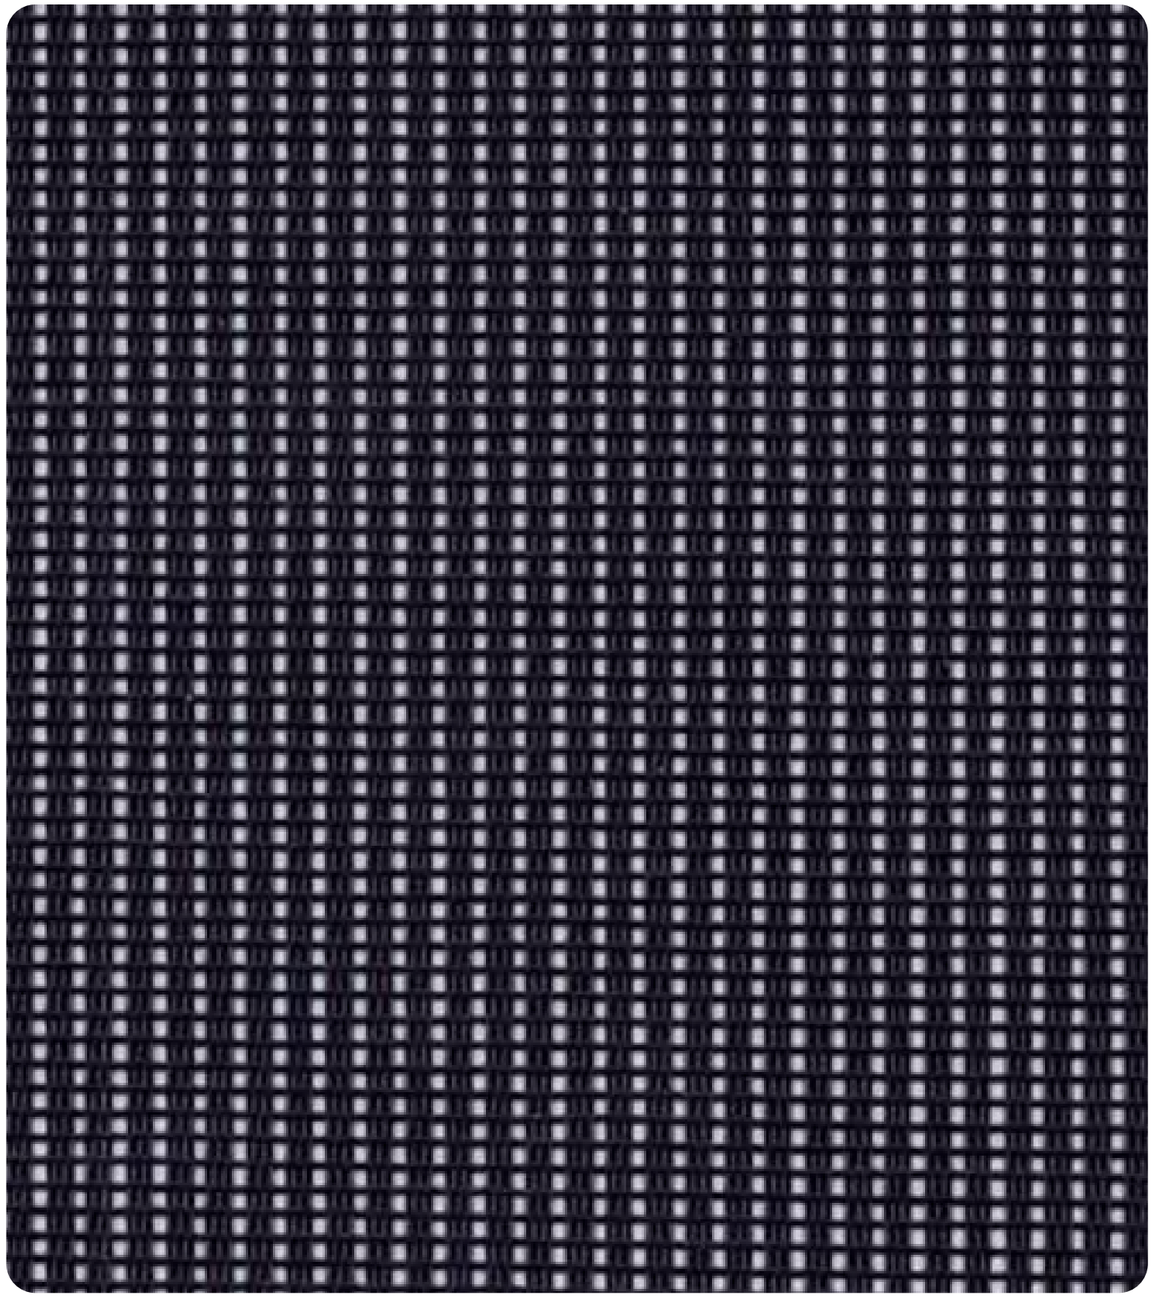

EBONY 0-004-66-01998

vertilux.mx

VX SCREEN
320-20%

VERTILUX
IDEAS PARA TU ESPACIO

TECHNICAL PROPERTIES

Composition	30% PES + 70% PVC
Weight	280 g/m² (± 5%) | 8.26 oz/yd² (± 5%)
Thickness	0.79 mm (± 5%) | 0.031 in (± 5%)
Yarn Diameter	Warp: 0.32 mm | Fill: 0.35 mm
Roll Width	2.5 m | 98 in
Roll Length	30 m | 32.81 yd
Openness Factor	15 - 20%
UV Blockage	80 - 85%
Mesh/in	Warp: 52 | Fill: 15
Light Fastness	Class 4 - 5
Tensile Strength	Warp: 141 daN/5cm | Weft: 42 daN/5cm
Tearing Strength	Warp: 23 daN | Weft: 5 daN
Flame Retardant	NFPA 701

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)	Tv(%)
Ebony	32	38	30	33
Ivory White	30	28	42	34
Linen	32	35	33	35
White	48	41	11	36
White Grey	34	36	30	36
White Linen	45	31	24	35

CARE & MAINTENANCE

1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING

Use Only on Roll Direction

COLD
Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS

The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS

Roller Shades

Sliding Panels

Indoor Use Only




IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

VERTILUX
IDEAS PARA TU ESPACIO

VX SCREEN

Vertilux México

Copyright © 2022. Todos los derechos reservados.

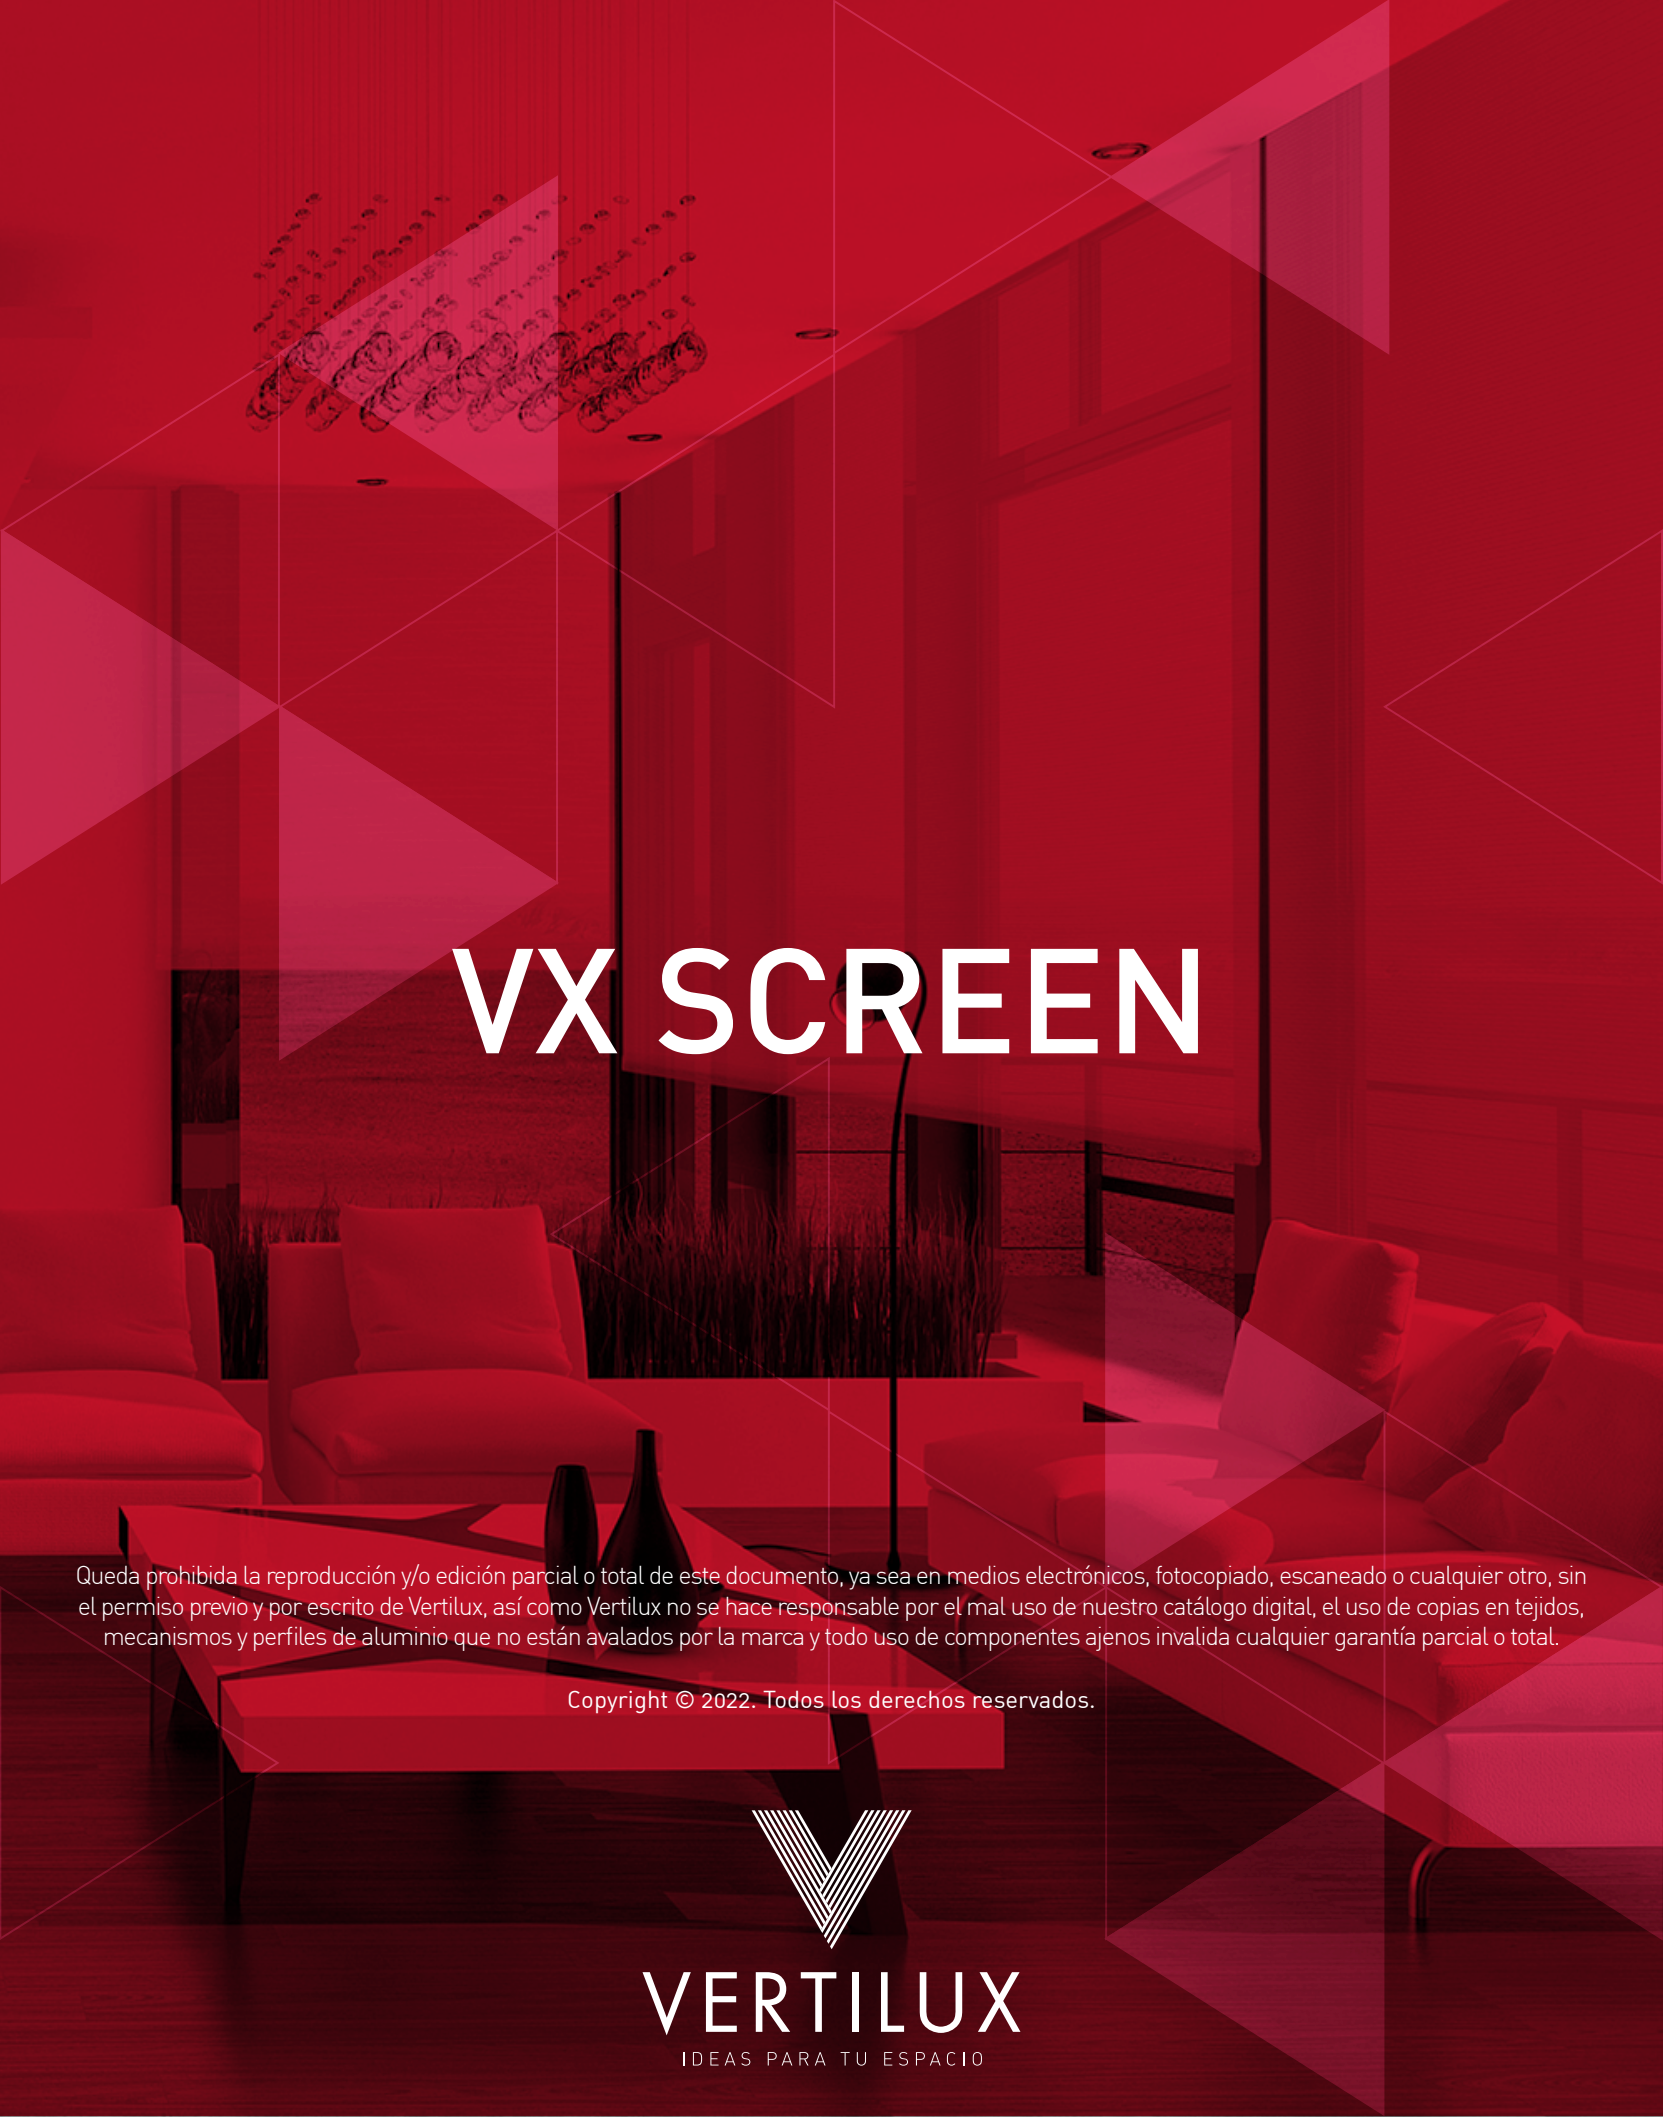

VX SCREEN

Queda prohibida la reproducción y/o edición parcial o total de este documento, ya sea en medios electrónicos, fotocopiado, escaneado o cualquier otro, sin el permiso previo y por escrito de Vertilux, así como Vertilux no se hace responsable por el mal uso de nuestro catálogo digital, el uso de copias en tejidos, mecanismos y perfiles de aluminio que no están avalados por la marca y todo uso de componentes ajenos invalida cualquier garantía parcial o total.

Copyright © 2022. Todos los derechos reservados.

VERTILUX

IDEAS PARA TU ESPACIO